
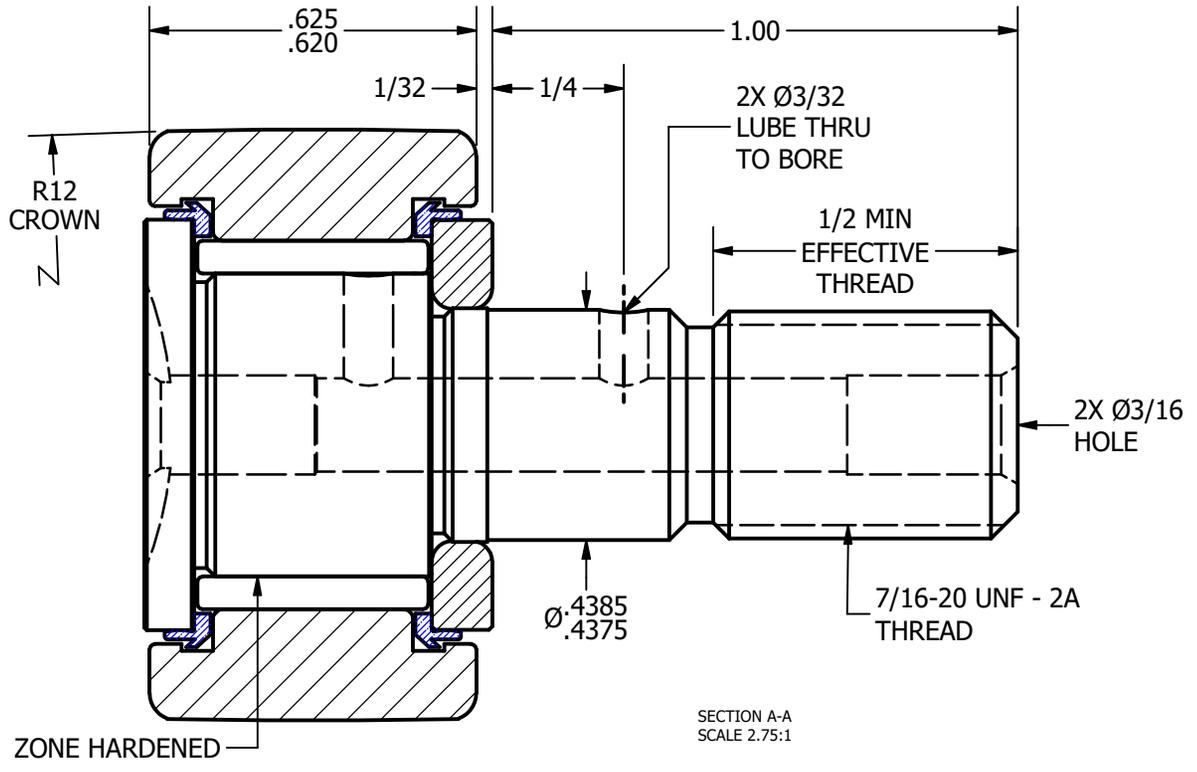
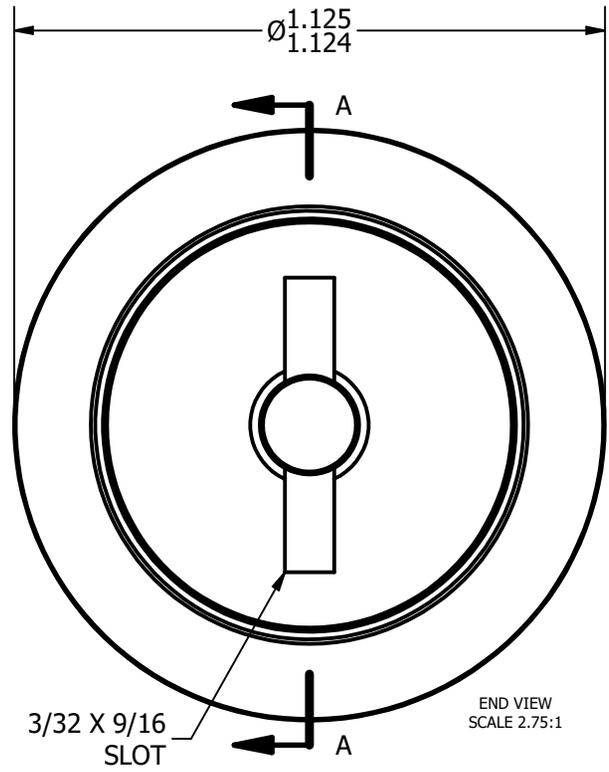


| LOAD RATINGS | |
|-------------------------|-------|
| RATING | Lbs |
| RADIAL BASIC DYNAMIC | 2,225 |
| MAXIMUM STATIC CAPACITY | 3,060 |

NOTES:
 1. BEARING IS PACKED WITH LITHIUM BASED #2 WEIGHT GREASE
 2. ALL EXPOSED SURFACES HAVE BLACK OXIDE

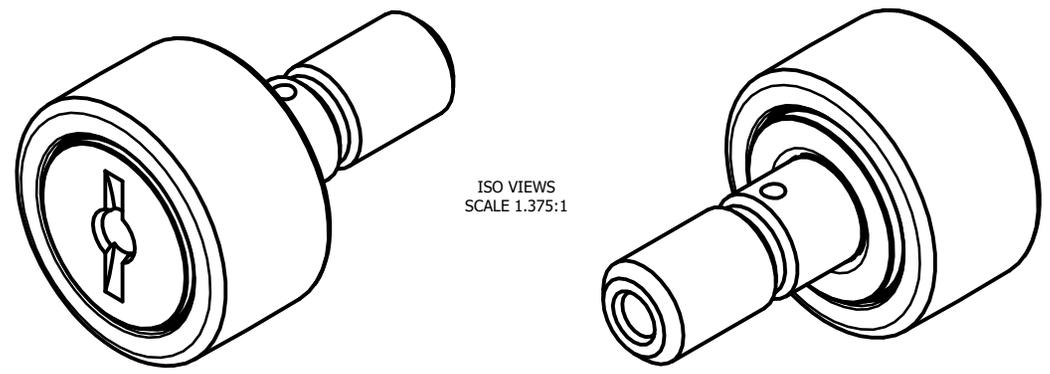

MATERIAL NOTES:

OUTER RACE - BEARING STEEL, HEAT TREATED
 STUD - BEARING STEEL, ZONE HARDENED
 NEEDLE ROLLER - BEARING STEEL, HEAT TREATED
 WASHER - COLD ROLLED STEEL, HEAT TREATED
 SEAL - SYNTHETIC

| | |
|----------------|--|
| CUSTOMER PART# | .XX = ± .01 .XXX = ± .005 .XXXX = ± .0005 ANGLES = ± 1' INCH [METRIC] FRACTION = ± 1/32 |
| CHANGE NOTE: | |

CARTER MANUFACTURING IS NOT RESPONSIBLE FOR TYPOGRAPHICAL ERRORS

| REVISION | |
|-----------------------|--------------------------|
| B | AUTHOR. BY DB |
| REV. BY SGW | DATE 4/24/2013 |

CARTER MANUFACTURING CO., INC.
 GRAND HAVEN, MICHIGAN 49417

| | | | | | |
|--------------------------|--------------------------|-------------------------|---------------------------------|--------------|--|
| PART NAME: ASSEMBLY | | | | SHEET 1 OF 2 | |
| DRAWN BY EMD | CHK'D BY MD | SALES KR | MATERIAL NOTED | | |
| DATE 6/27/2006 | DATE 4/24/2013 | DATE 4/8/2013 | DRAWING NO. CCNB-36-S | | |