

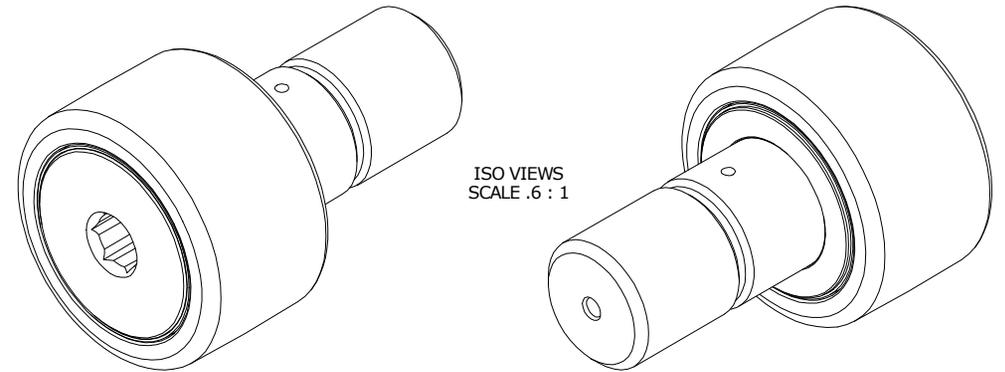


LOAD RATINGS	
RATING	Lbs
RADIAL BASIC DYNAMIC	11,720
MAXIMUM STATIC CAPACITY	32,900

- NOTES:
1. BEARING IS PACKED WITH NLGI GRADE 2, LITHIUM BASED GREASE UNLESS OTHERWISE SPECIFIED
  2. ALL EXPOSED SURFACES HAVE BLACK OXIDE
  3. CUSTOM LASER ETCHING AVAILABLE UPON REQUEST

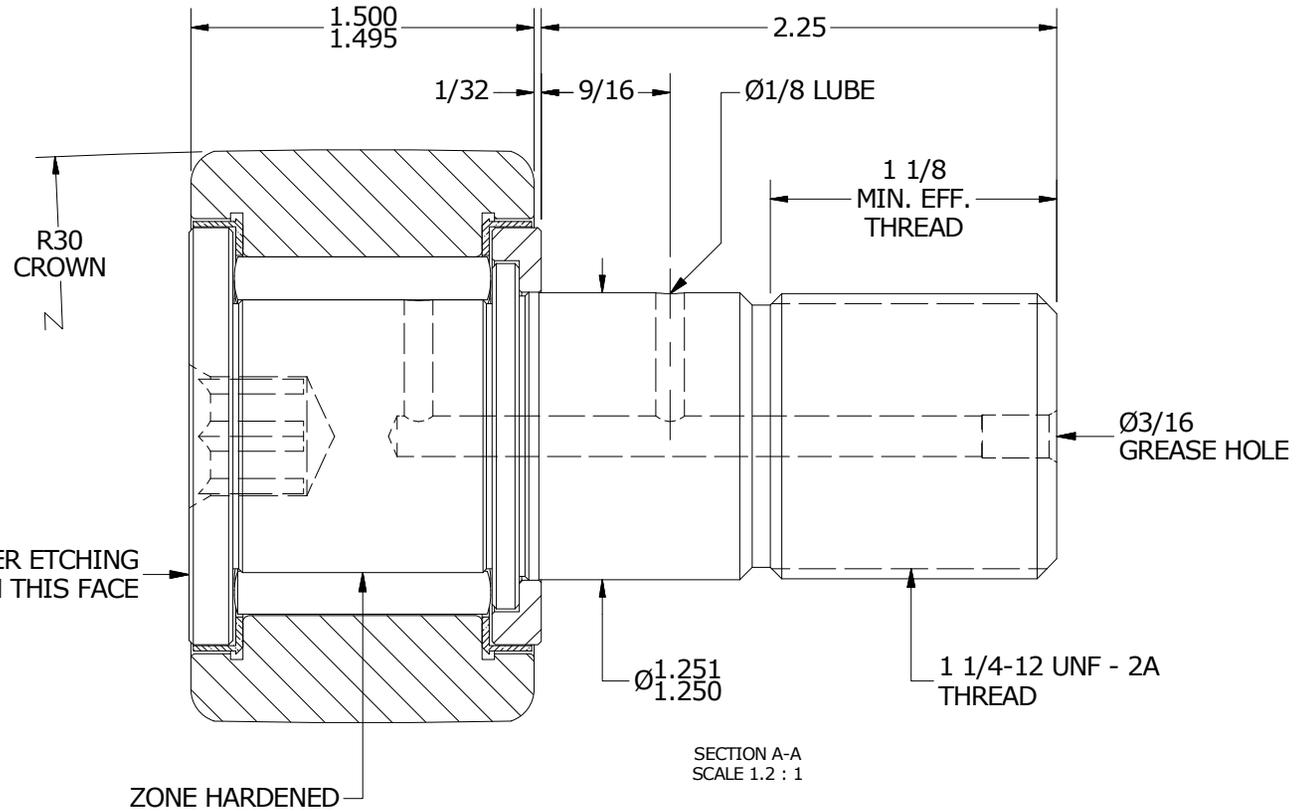

ISO VIEWS  
SCALE .6 : 1

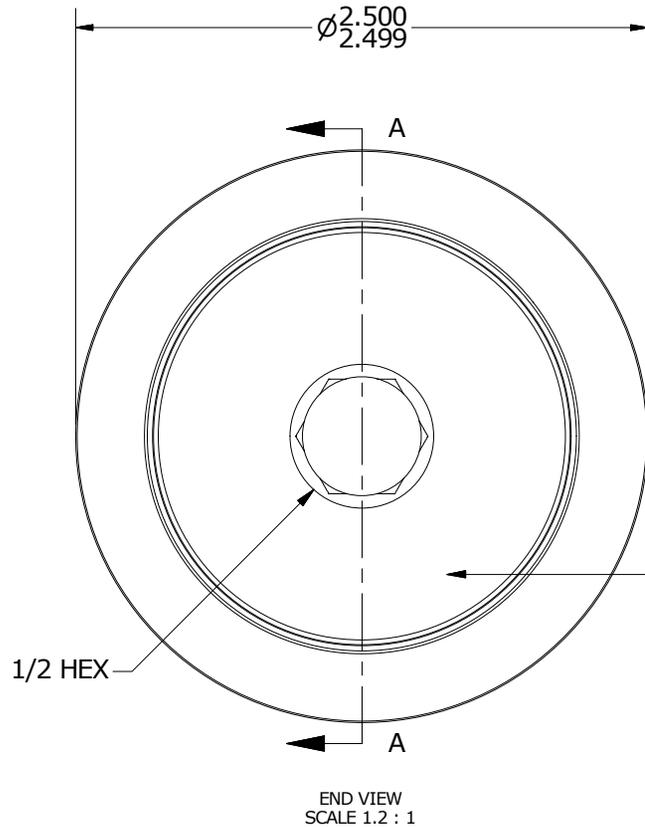

MATERIAL NOTES:

- OUTER RING - BEARING STEEL, HEAT TREATED
- STUD - BEARING STEEL, ZONE HARDENED
- NEEDLE ROLLERS - BEARING STEEL, HEAT TREATED
- WASHER - STEEL, HEAT TREATED
- SEALS - SYNTHETIC

CUSTOMER PART#	XX = ± .01 XXX = ± .005 XXXX = ± .0005 ANGLES = ± 1' INCH [METRIC] FRACTION = ± 1/32
ENGINEERING CHANGE ORDER NOTE	

CARTER MANUFACTURING IS NOT RESPONSIBLE FOR TYPOGRAPHICAL ERRORS

**CARTER MANUFACTURING CO., INC.**  
GRAND HAVEN, MICHIGAN 49417

REVISION		PART NAME: ASSEMBLY			PRODUCT TYPE: CCNBH	
<b>B</b>	AUTHOR BY HG	DRAWN BY AJH	CHK'D BY SGW	SALES KPR	MATERIAL NOTED	
REVISION BY MD	DATE 4/12/2019	DATE 12/19/2001	DATE 4/12/2019	DATE 12/17/2001	SHEET 1 OF 2	