

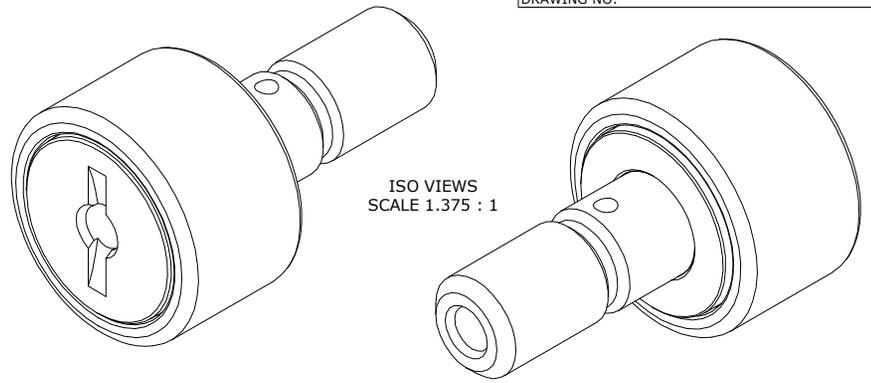


LOAD RATINGS	
RATING	Lbs
RADIAL BASIC DYNAMIC	2,225
MAXIMUM STATIC CAPACITY	3,060

- NOTES:
1. BEARING IS PACKED WITH LITHIUM BASED #2 WEIGHT GREASE
 2. ALL EXPOSED SURFACES HAVE BLACK OXIDE

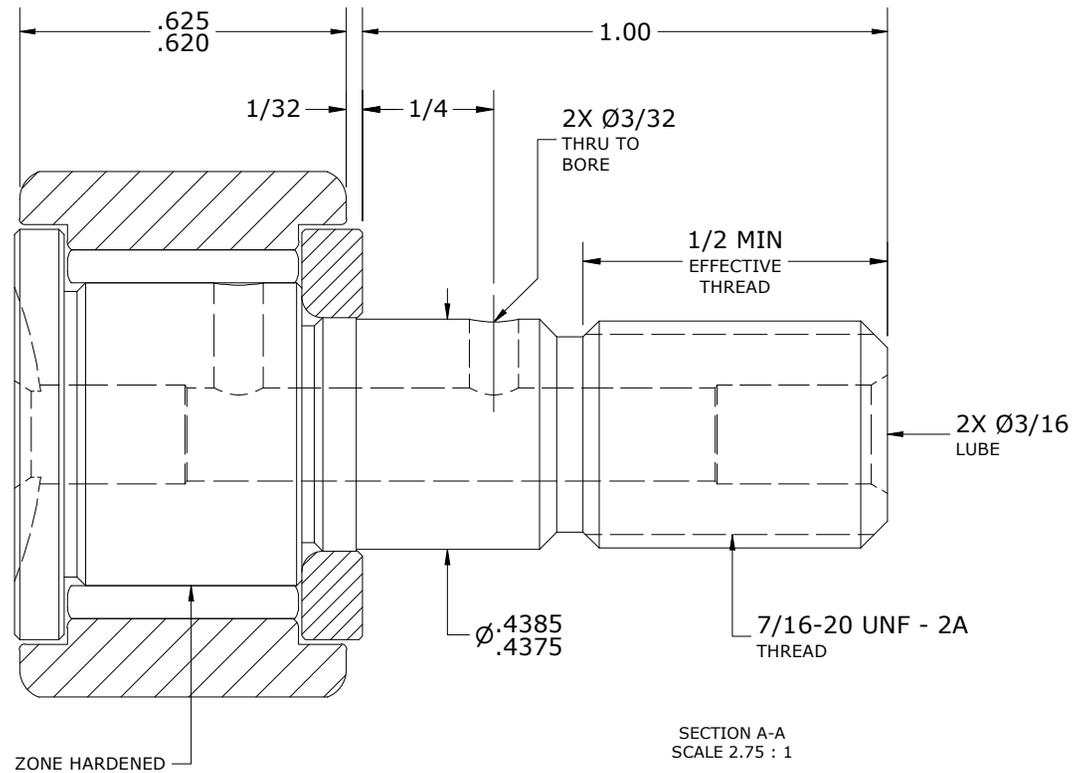

ISO VIEWS
SCALE 1.375 : 1

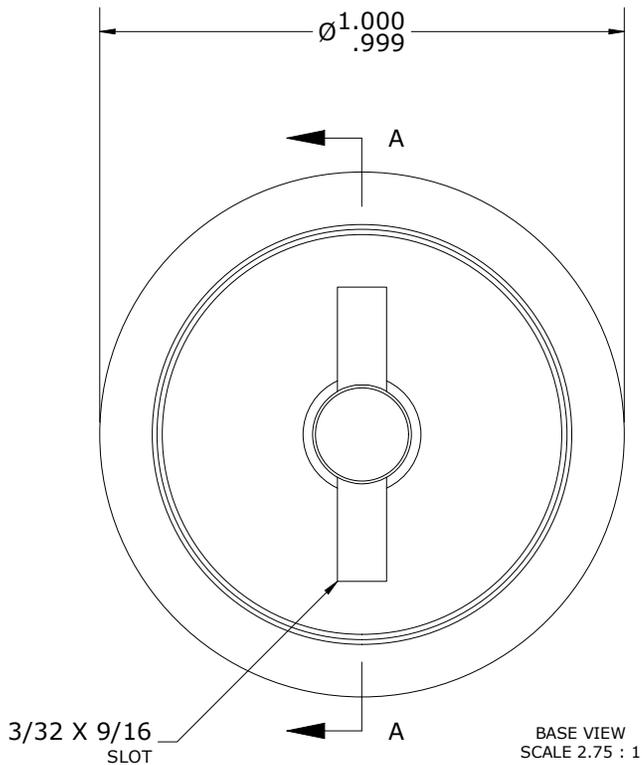

- MATERIAL NOTES:
- OUTER RING - BEARING STEEL, HEAT TREATED
 - STUD - BEARING STEEL, ZONE HARDENED
 - NEEDLE ROLLER(S) - BEARING STEEL, HEAT TREATED
 - WASHER - STEEL, HEAT TREATED

CUSTOMER PART#

XX = ± .01
XXX = ± .005
XXXX = ± .0005
ANGLES = ± 2'
INCH [METRIC]
FRACTION = ± 1/64

CARTER MANUFACTURING IS NOT RESPONSIBLE FOR TYPOGRAPHICAL ERRORS

CARTER MANUFACTURING CO., INC.
GRAND HAVEN, MICHIGAN 49417

ENGINEERING CHANGE ORDER NOTE

REVISION

PART NAME: ASSEMBLY

PRODUCT TYPE: Standard CF

D

AUTHOR BY
DB

DRAWN BY
GJP

CHK'D BY
MD

SALES
KPR

MATERIAL
NOTED

CARTER STANDARD SURFACE FINISH IS MEASURED IN "Ra" UNITS UNLESS OTHERWISE SPECIFIED.

REVISION BY
SGW

DATE
4/24/2013

DATE
10/26/2000

DATE
4/24/2013

DATE
10/25/2000

SHEET
1 OF 2