


LOAD RATINGS


| | |
|-------------------------|-------|
| RATING | Lbs |
| RADIAL BASIC DYNAMIC | 2,225 |
| MAXIMUM STATIC CAPACITY | 3,060 |

NOTES:


1. BEARING IS PACKED WITH LITHIUM BASED #2 WEIGHT GREASE
2. ALL EXPOSED SURFACES HAVE BLACK OXIDE

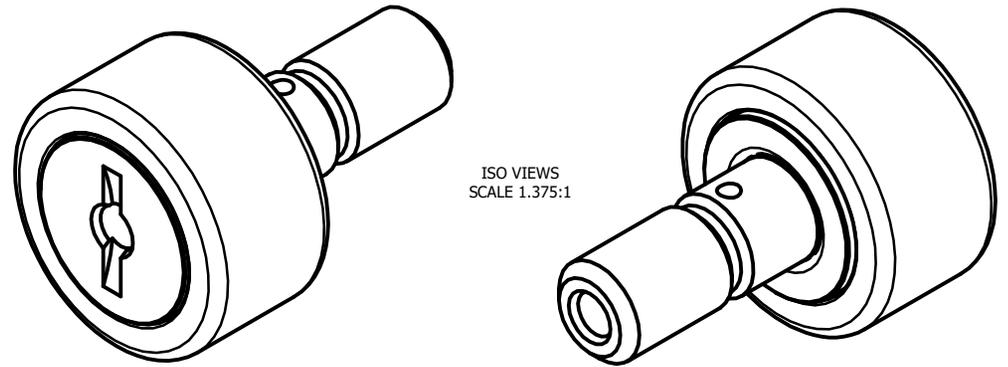

ISO VIEWS
SCALE 1.375:1

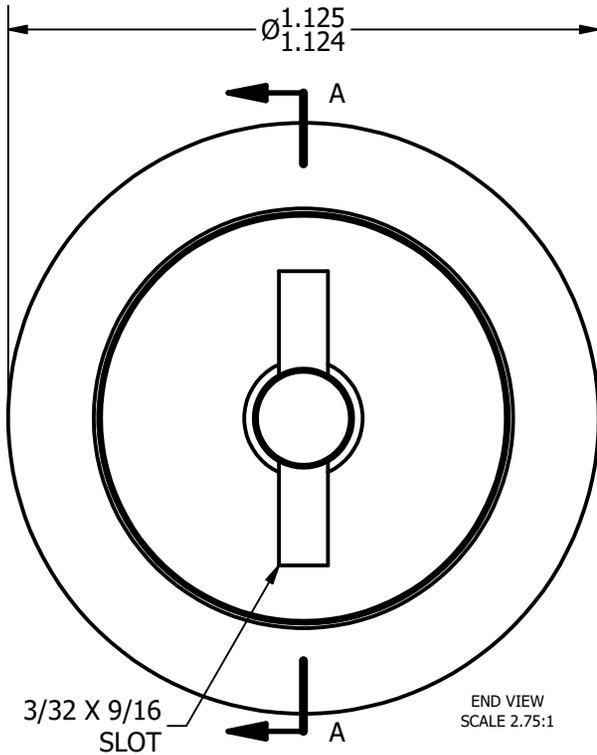

END VIEW
SCALE 2.75:1

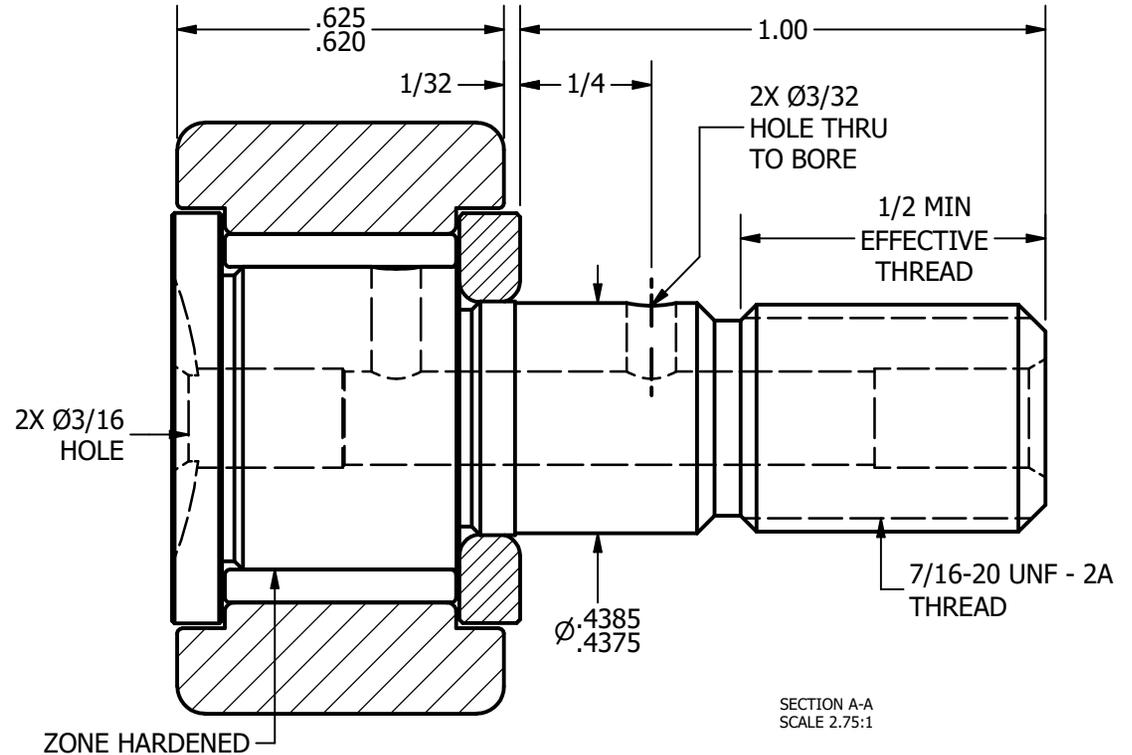

SECTION A-A
SCALE 2.75:1

MATERIAL NOTES:

OUTER RACE - BEARING STEEL, HEAT TREATED
 STUD - BEARING STEEL, ZONE HARDENED
 NEEDLE ROLLER - BEARING STEEL, HEAT TREATED
 WASHER - COLD ROLLED STEEL, HEAT TREATED

CUSTOMER PART#

.XX = ± .01
 .XXX = ± .005
 .XXXX = ± .0005
 ANGLES = ± 1'
 INCH [METRIC]
 FRACTION = ± 1/32

CHANGE NOTE:

CARTER MANUFACTURING IS NOT RESPONSIBLE FOR TYPOGRAPHICAL ERRORS

CARTER MANUFACTURING CO., INC.

GRAND HAVEN, MICHIGAN 49417

REVISION

PART NAME: ASSEMBLY

SHEET 1 OF 2

B

REV. BY

AUTHOR. BY

DRAWN BY

CHK'D BY

SALES

MATERIAL

DB

JAF

MD

KR

NOTED

DATE

DATE

DATE

DATE

DRAWING NO.

4/24/2013

6/26/2006

4/24/2013

4/24/2013

CNB-36