

LOAD RATINGS	
RATING	Lbs
RADIAL BASIC DYNAMIC	4,840
MAXIMUM STATIC CAPACITY	5,640


NOTES:

1. BEARING IS PACKED WITH NLGI GRADE 2, LITHIUM BASED GREASE
2. ALL EXPOSED SURFACES HAVE BLACK OXIDE




MS NO.

NSN NO.

DRAWING NO.

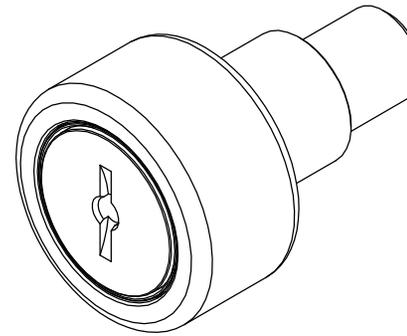

ISO VIEWS
SCALE .875 : 1

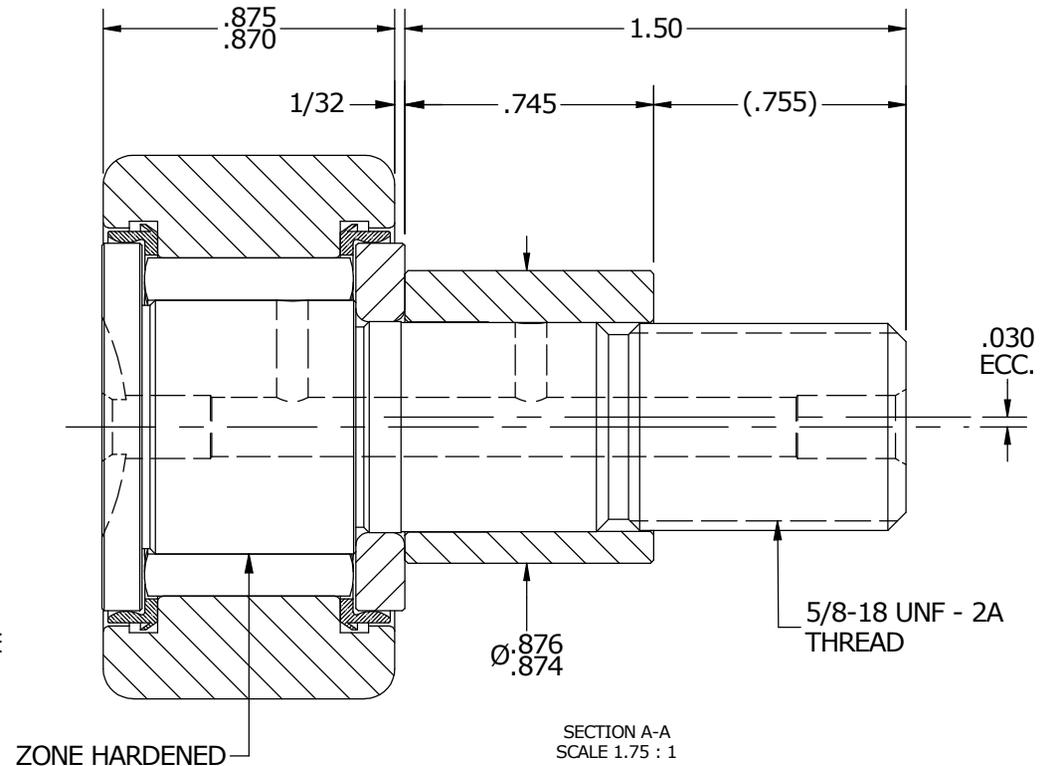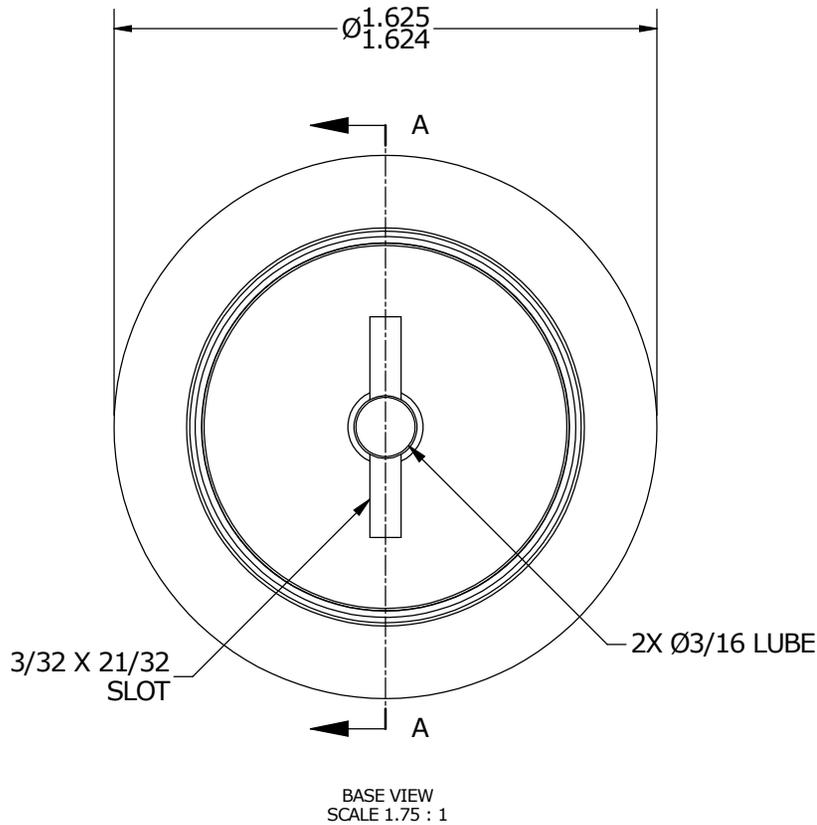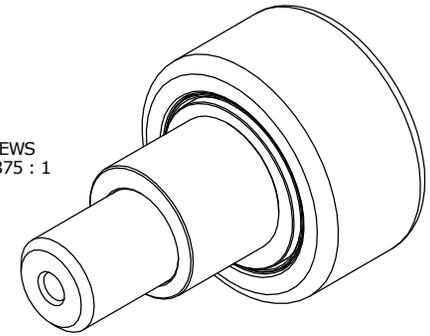

MATERIAL NOTES:

- OUTER RACE - BEARING STEEL, HEAT TREATED
- STUD - BEARING STEEL, ZONE HARDENED
- NEEDLE ROLLERS - BEARING STEEL, HEAT TREATED
- WASHER - COLD ROLLED STEEL, HEAT TREATED
- ECCENTRIC SLEEVE - COLD ROLLED STEEL
- SEALS - SYNTHETIC

CUSTOMER PART#

XX = ± .01
XXX = ± .005
XXXX = ± .0005
ANGLES = ± 1'
INCH [METRIC]
FRACTION = ± 1/32

CARTER MANUFACTURING IS NOT RESPONSIBLE FOR TYPOGRAPHICAL ERRORS

CARTER MANUFACTURING CO., INC.

GRAND HAVEN, MICHIGAN 49417

REVISION

PART NAME: Assembly

ENGINEERING CHANGE ORDER NOTE

B

AUTHOR BY

DRAWN BY

CHK'D BY

SALES

MATERIAL

DB

JAF

SGW

KR

NOTED

REVISION BY

DATE

DATE

DATE

DATE

SHEET

MD

11/25/2013

7/14/2006

11/25/2013

7/12/2006

1 OF 2