
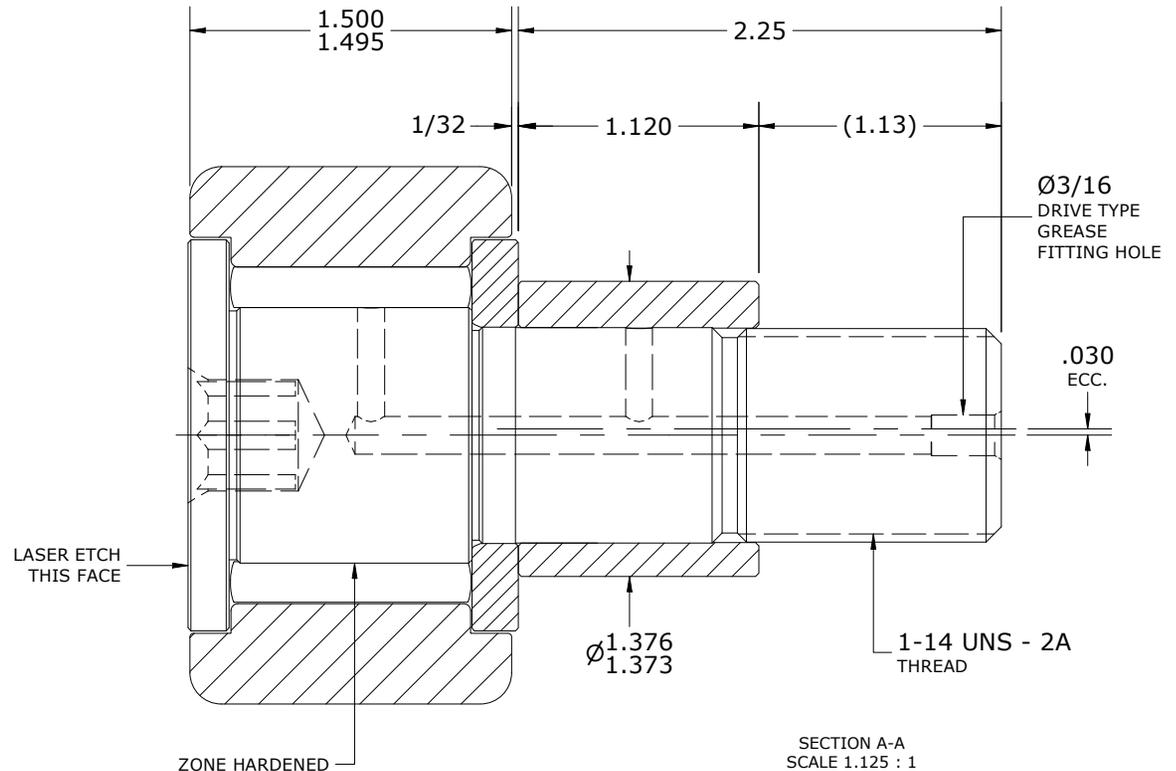
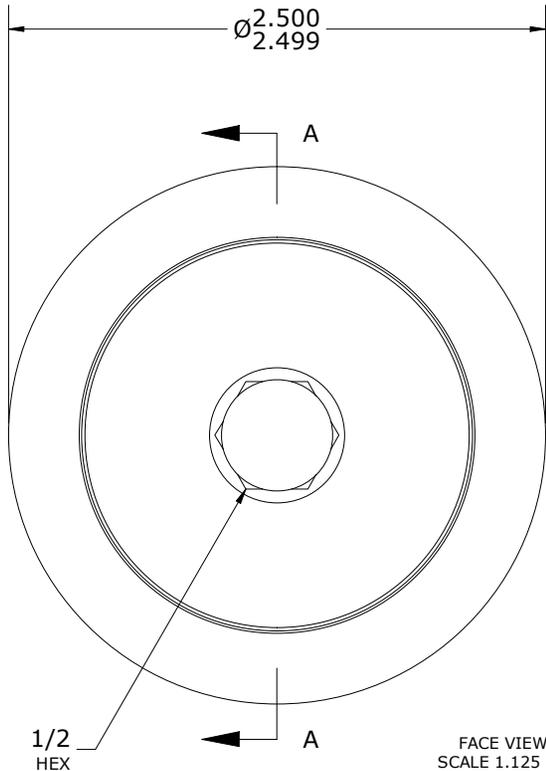


LOAD RATINGS		
RATING	lbf	Newtons
RADIAL BASIC DYNAMIC	11,720	52,133
MAXIMUM STATIC CAPACITY	16,450	73,173

- NOTES:
- BEARING IS PACKED WITH NLGI GRADE 2, LITHIUM BASED GREASE (UNLESS OTHERWISE SPECIFIED)
  - ALL EXPOSED SURFACES HAVE BLACK OXIDE
  - CUSTOM LASER ETCHING IS AVAILABLE UPON REQUEST
  - LIMITING SPEED:
    - GREASE = 1,100 RPM

RECOMMENDED MOUNTING HOLE Ø		
Limit	Inch	mm
MIN	1.377	34.9758
MAX	1.379	35.0266

MAXIMUM CLAMPING TORQUE**		
Thread Type	Inch lbf	Nm
LUBRICATED	1,125	127

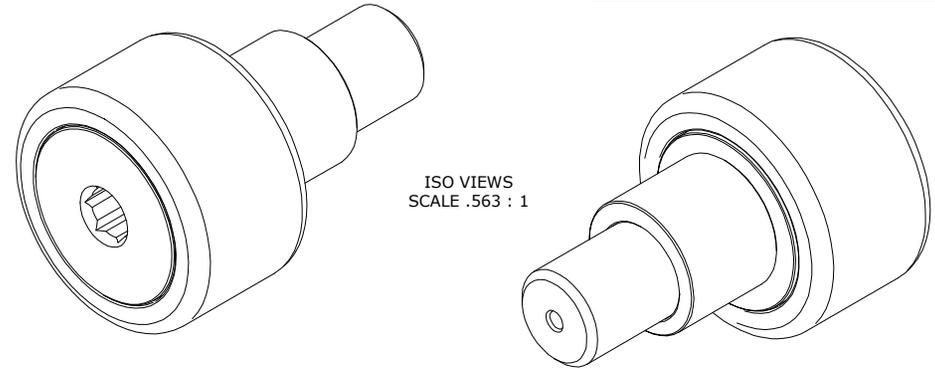

\*\*TORQUE SPECIFICATION IS BASED ON LUBRICATED THREADS, IF USING DRY THREADS DOUBLE TORQUE VALUE

MATERIAL NOTES:	
OUTER RING - BEARING STEEL, HEAT TREATED	
STUD - BEARING STEEL, ZONE HARDENED	
NEEDLE ROLLER(S) - BEARING STEEL, HEAT TREATED	
WASHER - BEARING STEEL, HEAT TREATED	
ECCENTRIC SLEEVE - STEEL	

CUSTOMER PART#	XX = ± .01 XXX = ± .005 XXXX = ± .0005 ANGLES = ± 2' INCH [METRIC] FRACTION = ± 1/64
<b>ENGINEERING CHANGE ORDER NOTE</b>	
CARTER STANDARD SURFACE FINISH IS MEASURED IN "Ra" UNITS UNLESS OTHERWISE SPECIFIED.	

CARTER MANUFACTURING IS NOT RESPONSIBLE FOR TYPOGRAPHICAL ERRORS	
REVISION	
<b>B</b>	AUTHOR BY HG
REVISION BY DJB	DATE 10/17/2024

CARTER MANUFACTURING CO., INC. GRAND HAVEN, MICHIGAN 49417					
PART NAME: ASSEMBLY			PRODUCT TYPE: Standard CF		
DRAWN BY JAF	CHK'D BY MD	SALES KPR	MATERIAL NOTED	DATE 7/10/2006	SHEET 1 OF 2
DATE 7/11/2006	DATE 10/17/2024	DATE 7/10/2006			