



LOAD RATINGS	
RATING	Lbs
RADIAL BASIC DYNAMIC	35,840
STATIC THRUST LOAD	33,100
MAXIMUM STATIC CAPACITY	56,400

NOTES:
 1. BEARING COMES PACKED WITH LITHIUM BASED #2 WEIGHT GREASE
 2. OUTER MAY COME WITH BLACK OXIDE


DRAWING NO. CPHR-600-A

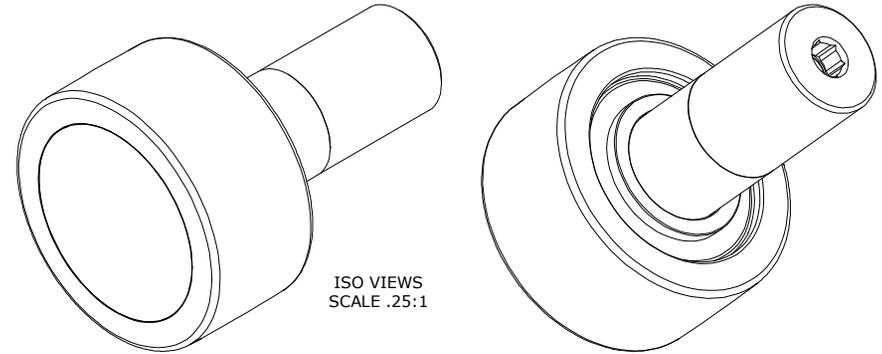

ISO VIEWS
SCALE .25:1

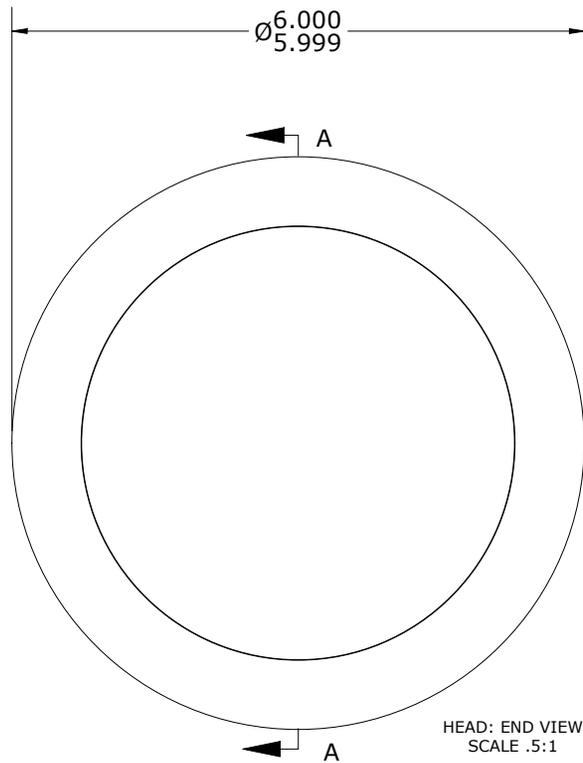

HEAD: END VIEW
SCALE .5:1

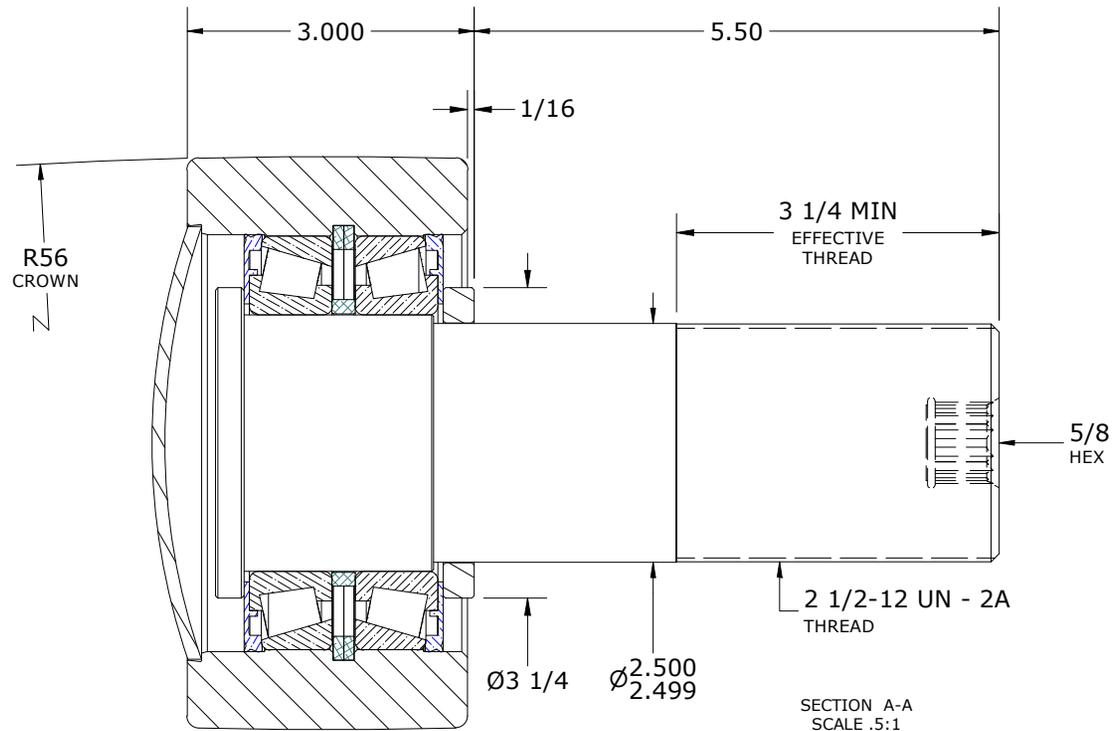

SECTION A-A
SCALE .5:1

MATERIAL NOTES:

OUTER - BEARING STEEL, HEAT TREATED
 STUD - COLD ROLLED STEEL
 BEARING ASSY. - 395LA-90329
 WASHER - COLD ROLLED STEEL
 END CAP - COLD ROLLED STEEL

CUSTOMER PART#

XX = ± .01
 XXX = ± .005
 XXXX = ± .0005
 ANGLES = ± 2'
 INCH [METRIC]
 FRACTION = ± 1/64

CARTER MANUFACTURING IS NOT RESPONSIBLE FOR TYPOGRAPHICAL ERRORS

CARTER MANUFACTURING CO., INC.

GRAND HAVEN, MICHIGAN 49417

ENGINEERING CHANGE ORDER NOTE

REVISION

PART NAME: ASSEMBLY

PRODUCT TYPE: Hi-Rollers™

A

AUTHOR BY
DB

DRAWN BY
SGW

CHK'D BY
MD

SALES
KR

MATERIAL
NOTED

CARTER STANDARD SURFACE FINISH IS MEASURED IN "Ra" UNITS UNLESS OTHERWISE SPECIFIED.

REVISION BY
SGW

DATE
2/2/2010

DATE
1/28/2010

DATE
2/2/2010

DATE
2/2/2010

SHEET
1 OF 2