
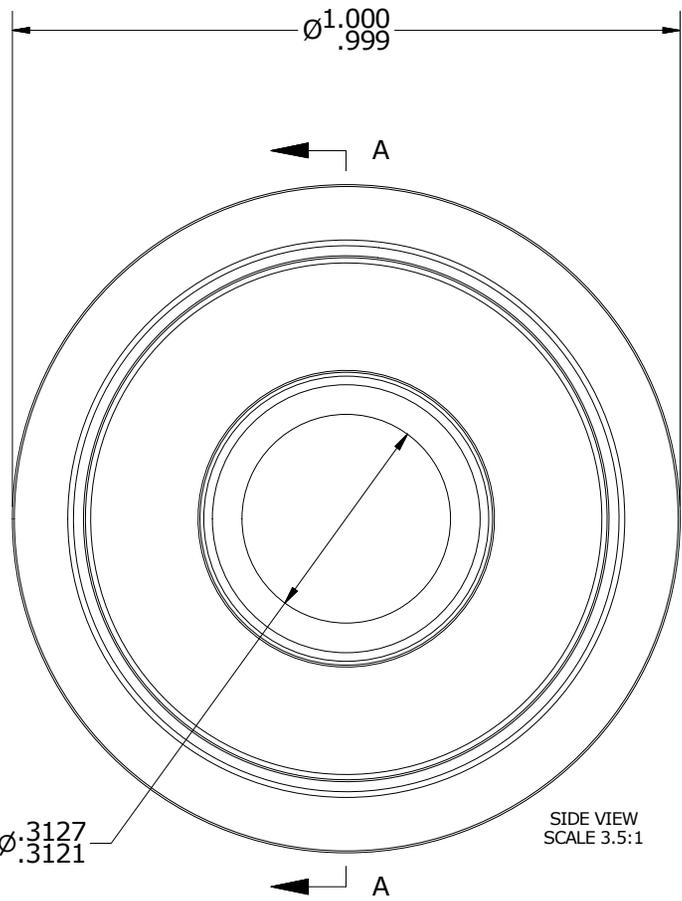



LOAD RATINGS	
RATING	Lbs
RADIAL BASIC DYNAMIC	2,000
MAXIMUM STATIC CAPACITY	5,400

NOTES:
 1. BEARING IS PACKED WITH NLGI GRADE 2, FOOD GRADE H1 GREASE (UNLESS OTHERWISE SPECIFIED)

ISO VIEW
 SCALE 1.625 : 1

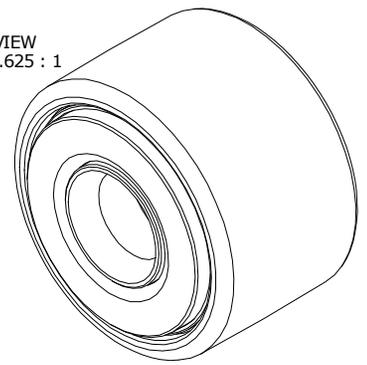

SIDE VIEW
 SCALE 3.5:1

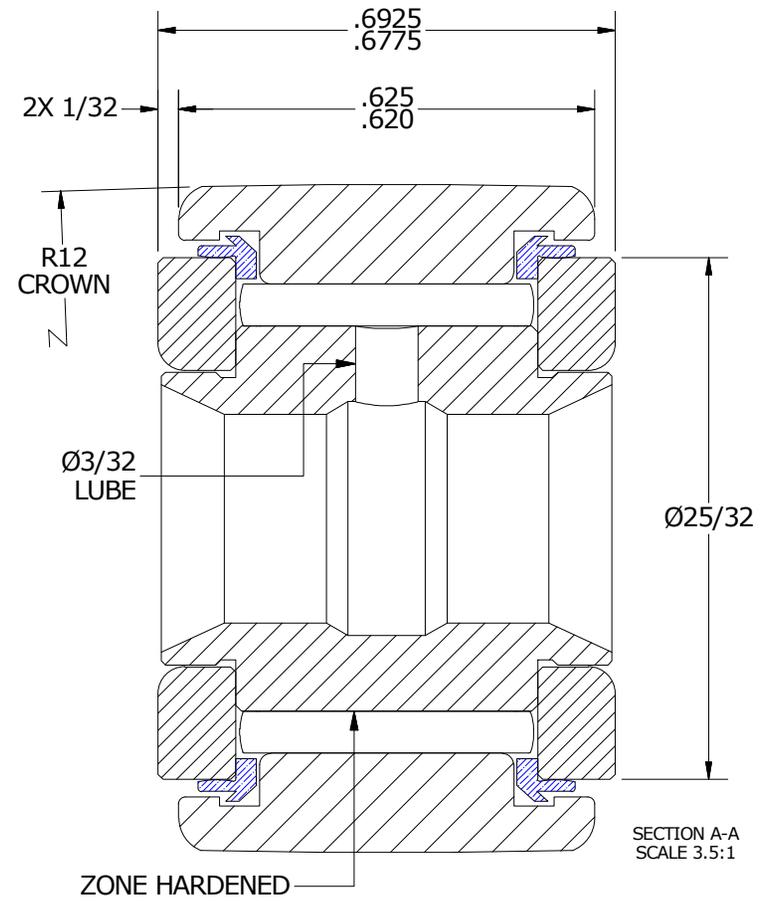

SECTION A-A
 SCALE 3.5:1

MATERIAL NOTES:

OUTER RING - 440C STAINLESS STEEL, HEAT TREATED
 INNER RING - 440C STAINLESS STEEL, ZONE HARDENED
 WASHER(S) - 440C STAINLESS STEEL, HEAT TREATED
 NEEDLE ROLLER(S) - 440C STAINLESS STEEL, HEAT TREATED
 SEAL(S) - SYNTHETIC

CUSTOMER PART#
 XX = ± .01
 XXX = ± .005
 XXXX = ± .0005
 ANGLES = ± 1'
 INCH [METRIC]
 FRACTION = ± 1/32

CARTER MANUFACTURING IS NOT RESPONSIBLE FOR TYPOGRAPHICAL ERRORS

CARTER MANUFACTURING CO., INC.
 GRAND HAVEN, MICHIGAN 49417

ENGINEERING CHANGE ORDER NOTE

REVISION		PART NAME: ASSEMBLY			
C	AUTHOR BY DB	DRAWN BY GJP	CHK'D BY MD	SALES KR	MATERIAL NOTED
REVISION BY SGW	DATE 7/8/2013	DATE 8/15/2000	DATE 7/8/2013	DATE 7/11/2013	SHEET 1 OF 2