



LOAD RATINGS	
RATING	Lbs
RADIAL BASIC DYNAMIC	46,575
MAXIMUM STATIC CAPACITY	135,900


NOTES:
 1. BEARING IS PACKED WITH LITHIUM BASED #2 WEIGHT GREASE
 2. ALL EXPOSED SURFACES HAVE BLACK OXIDE



ISO VIEW
SCALE .3125 : 1

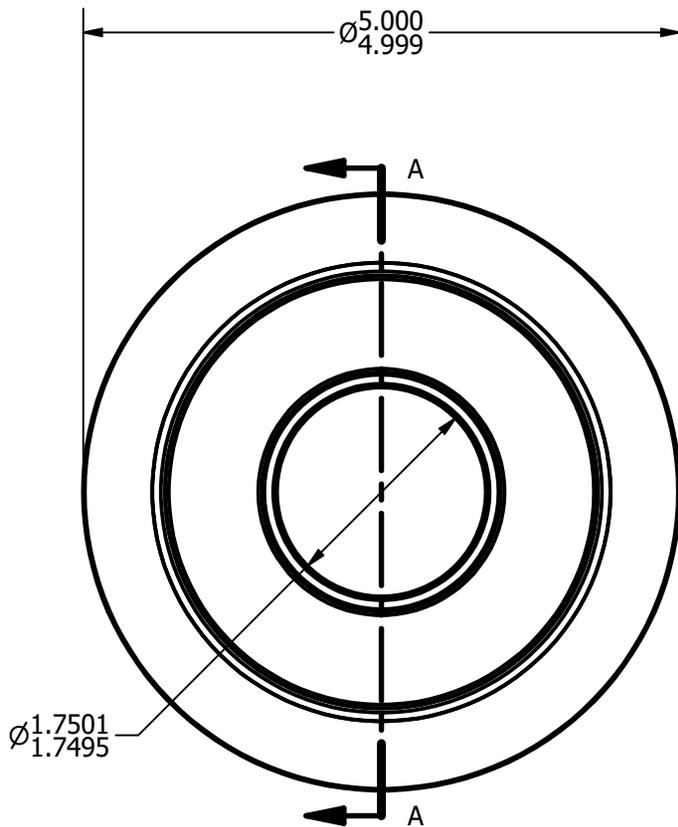

BASE VIEW
SCALE .625 : 1

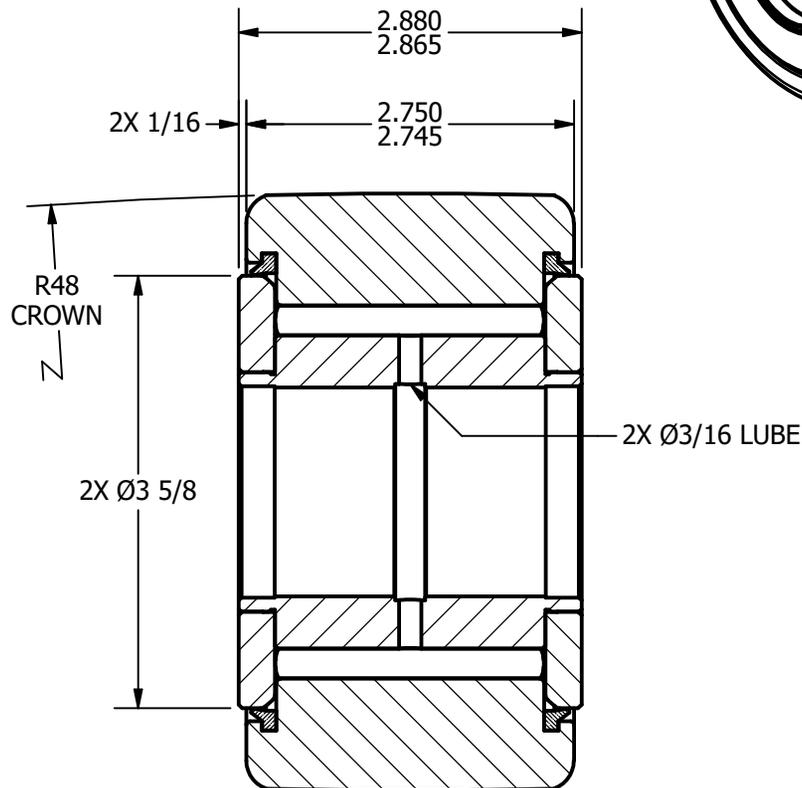

SECTION A-A
SCALE .625 : 1

MATERIAL NOTES:

OUTER RACE - BEARING STEEL, HEAT TREATED
 INNER RACE - BEARING STEEL, HEAT TREATED
 NEEDLE ROLLERS - BEARING STEEL, HEAT TREATED
 WASHERS - COLD ROLLED STEEL, HEAT TREATED
 SEALS - SYNTHETIC

CUSTOMER PART#

.XX = ± .01
 .XXX = ± .005
 .XXXX = ± .0005
 ANGLES = ± 1'
 INCH [METRIC]
 FRACTION = ± 1/32

CHANGE NOTE:

CARTER MANUFACTURING IS NOT RESPONSIBLE FOR TYPOGRAPHICAL ERRORS

CARTER MANUFACTURING CO., INC.
 GRAND HAVEN, MICHIGAN 49417

REVISION

PART NAME: ASSEMBLY

SHEET 1 OF 2

B

AUTHOR. BY

DRAWN BY

CHK'D BY

SALES

MATERIAL

DB

JAF

SGW

KPR

NOTED

REV. BY

DATE

DATE

DATE

DATE

DRAWING NO.

MD

6/5/2013

8/4/2006

6/5/2013

8/3/2006

CYNB-160-S