
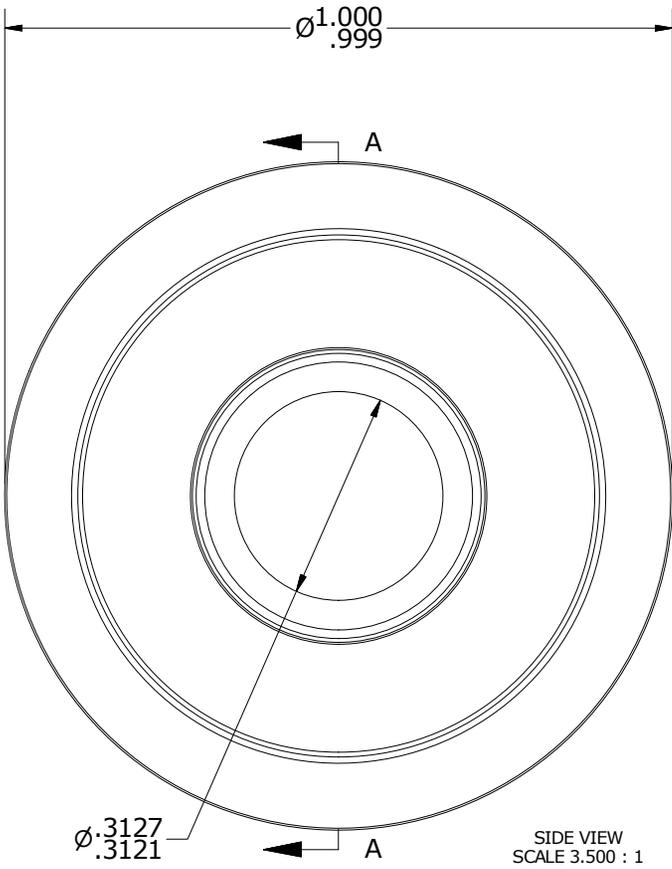



LOAD RATINGS		
RATING	lbf	Newton
RADIAL BASIC DYNAMIC	2,225	9,897
MAXIMUM STATIC CAPACITY	6,120	27,223

- NOTES:
1. BEARING IS PACKED WITH NLGI GRADE 2, LITHIUM BASED GREASE (UNLESS OTHERWISE SPECIFIED)
 2. ALL EXPOSED SURFACES AS MOUNTED HAVE BLACK OXIDE
 3. LIMITING SPEED:
 - A. GREASE = 4,800 RPM
 4. CUSTOM LASER ETCHING UPON REQUEST

ISO VIEW
SCALE 1.750 : 1

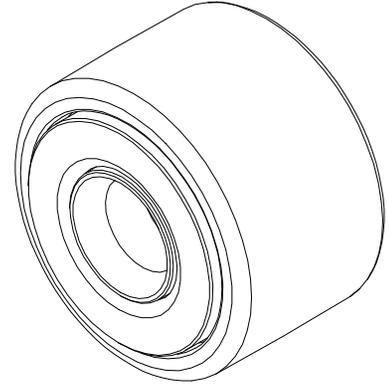

SIDE VIEW
SCALE 3.500 : 1

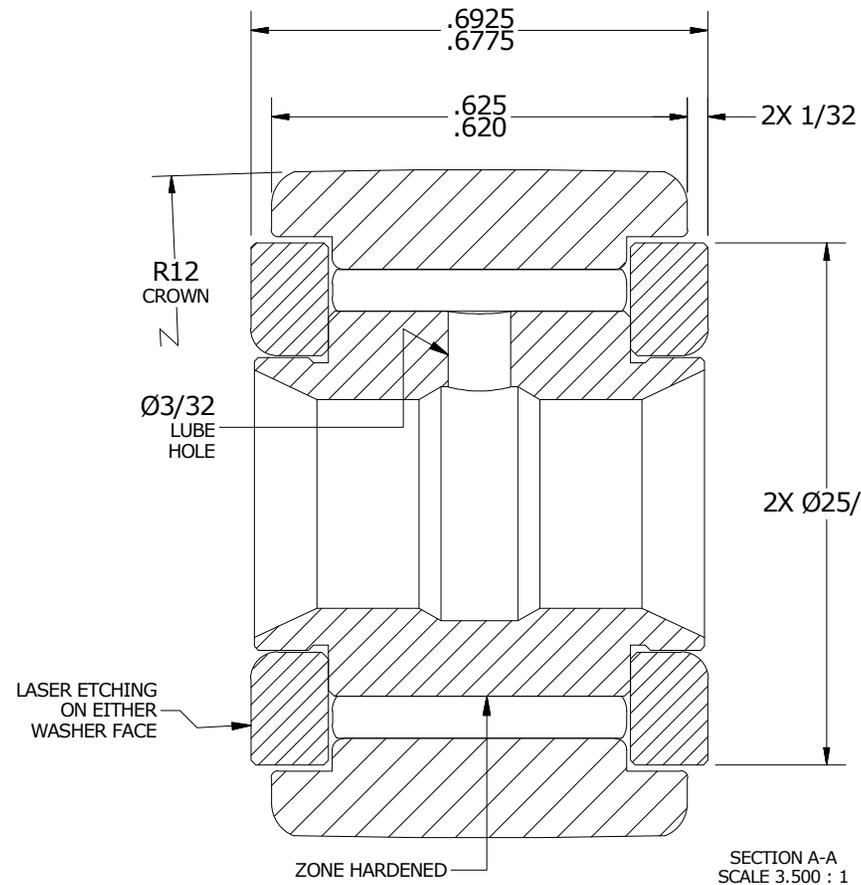

SECTION A-A
SCALE 3.500 : 1

Recommended Shaft Fits		
Fit Type - Dimension	\varnothing (Inch)	\varnothing (mm)
Push - Max	.3122	7.9300
Push - Min	.3118	7.9197
Drive - Max	.3128	7.9451
Drive - Min	.3124	7.9350
Press - Max	.3130	7.9502
Press - Min	.3126	7.9400

MATERIAL NOTES:

OUTER RING- BEARING STEEL, HEAT TREATED
 INNER RING- BEARING STEEL, ZONE HARDENED
 NEEDLE ROLLER(S) - BEARING STEEL, HEAT TREATED
 WASHER(S) - BEARING STEEL, HEAT TREATED

CUSTOMER PART#	XX = $\pm .01$ XXX = $\pm .005$ XXXX = $\pm .0005$ ANGLES = $\pm 1'$ INCH [METRIC] FRACTION = $\pm 1/32$
ENGINEERING CHANGE ORDER NOTE	

CARTER MANUFACTURING IS NOT RESPONSIBLE FOR TYPOGRAPHICAL ERRORS		CARTER MANUFACTURING CO., INC. GRAND HAVEN, MICHIGAN 49417			
REVISION		PART NAME: ASSEMBLY		PRODUCT TYPE: CNB	
A	AUTHOR BY HG	DRAWN BY SGW	CHK'D BY MD	SALES KR	MATERIAL NOTED
REVISION BY SGW	DATE 5/20/2015	DATE 5/19/2015	DATE 5/20/2015	DATE 5/21/2015	SHEET 1 OF 2