

LOAD RATINGS	
RATING	Lbs
RADIAL BASIC DYNAMIC	8,090
MAXIMUM STATIC CAPACITY	21,140

NOTES:

1. BEARING IS PACKED WITH NLGI GRADE 2, LITHIUM BASED GREASE (UNLESS OTHERWISE SPECIFIED)
2. ALL EXPOSED SURFACES HAVE BLACK OXIDE




MS NO.

NSN NO.

DRAWING NO.

CYNB-64

ISO VIEW  
SCALE .875 : 1

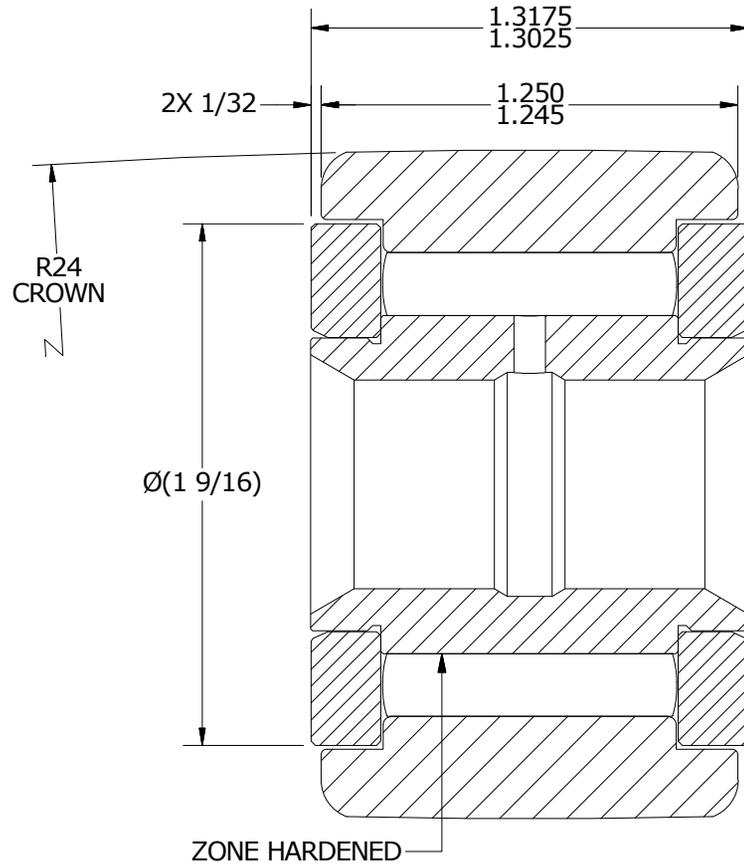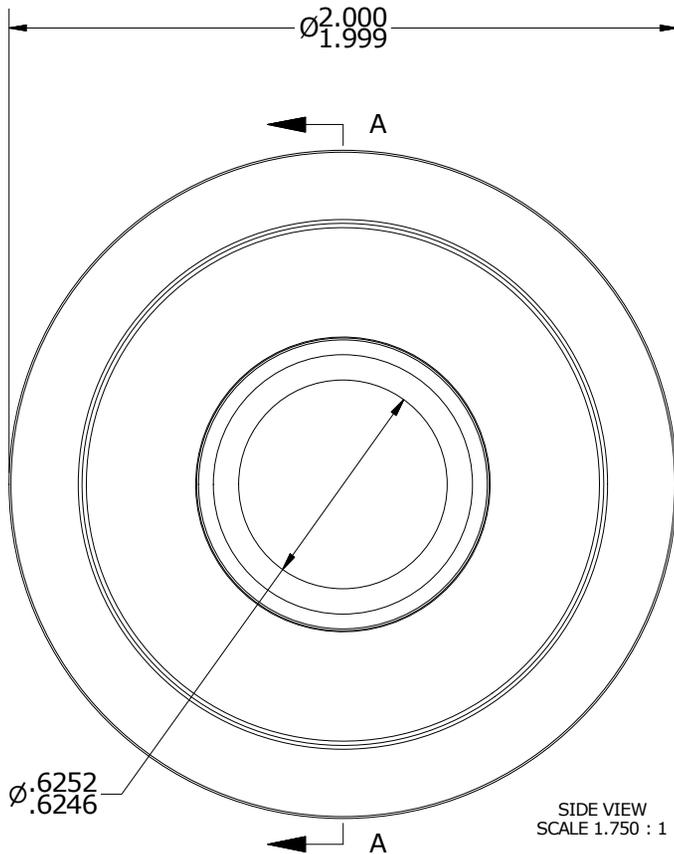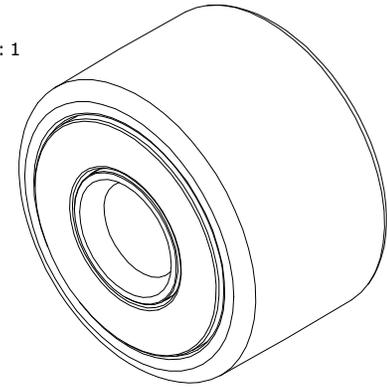

MATERIAL NOTES:

OUTER RING - BEARING STEEL, HEAT TREATED  
 INNER RING - BEARING STEEL, ZONE HARDENED  
 NEEDLE ROLLER(S) - BEARING STEEL, HEAT TREATED  
 WASHER(S) - BEARING STEEL, HEAT TREATED\*

CUSTOMER PART#

XX = ± .01  
 XXX = ± .005  
 XXXX = ± .0005  
 ANGLES = ± 1'  
 INCH [METRIC]  
 FRACTION = ± 1/32

CARTER MANUFACTURING IS NOT RESPONSIBLE FOR TYPOGRAPHICAL ERRORS

**CARTER MANUFACTURING CO., INC.**

GRAND HAVEN, MICHIGAN 49417

REVISION

PART NAME: ASSEMBLY

A

AUTHOR BY  
HG

DRAWN BY  
SGW

CHK'D BY  
MD

SALES  
KR

MATERIAL  
NOTED

REVISION BY  
SGW

DATE  
1/30/2017

DATE  
1/30/2017

DATE  
1/30/2017

DATE  
1/30/2017

SHEET  
1 OF 2

\*(DEPENDING ON MATERIAL AVAILABILITY, MAY BE CONSTRUCTED FROM COLD ROLLED STEEL)