



LOAD RATINGS	
RATING	Lbs
RADIAL BASIC DYNAMIC	35,840
STATIC THRUST LOAD	33,100
MAXIMUM STATIC CAPACITY	56,400

NOTES:


1. BEARING IS PACKED WITH NLGI GRADE 2, LITHIUM BASED GREASE UNLESS OTHERWISE SPECIFIED
2. ALL EXPOSED SURFACES HAVE BLACK OXIDE

DRAWING NO.


PHR-600-A

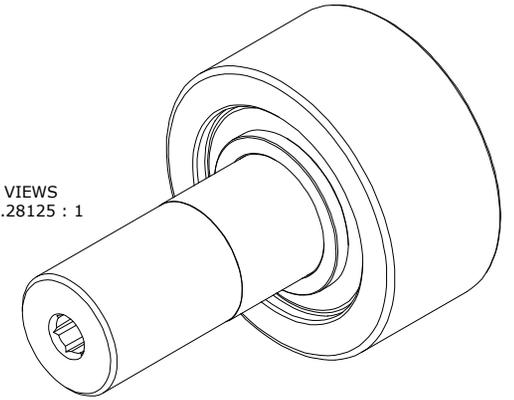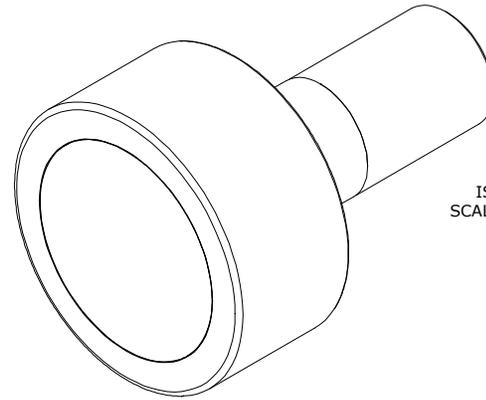

ISO VIEWS
SCALE .28125 : 1

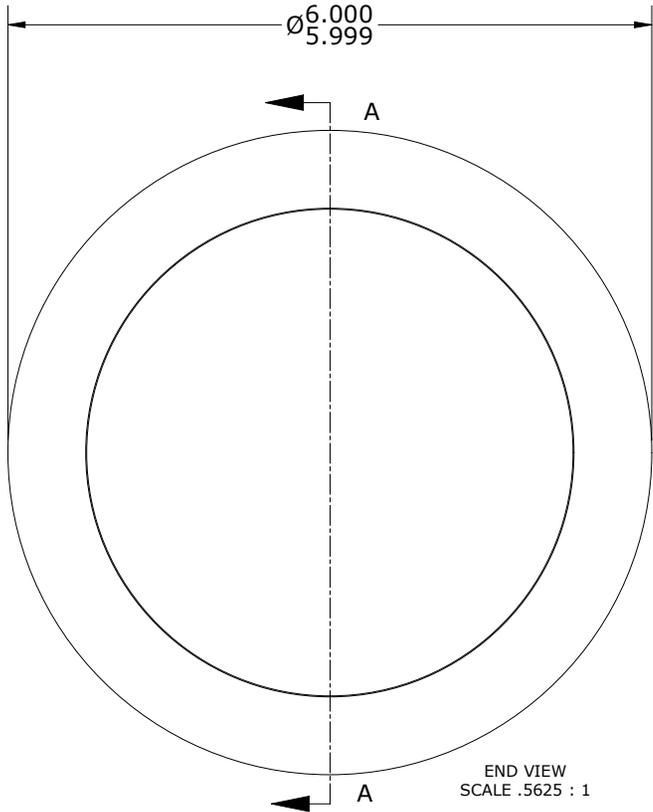

END VIEW
SCALE .5625 : 1

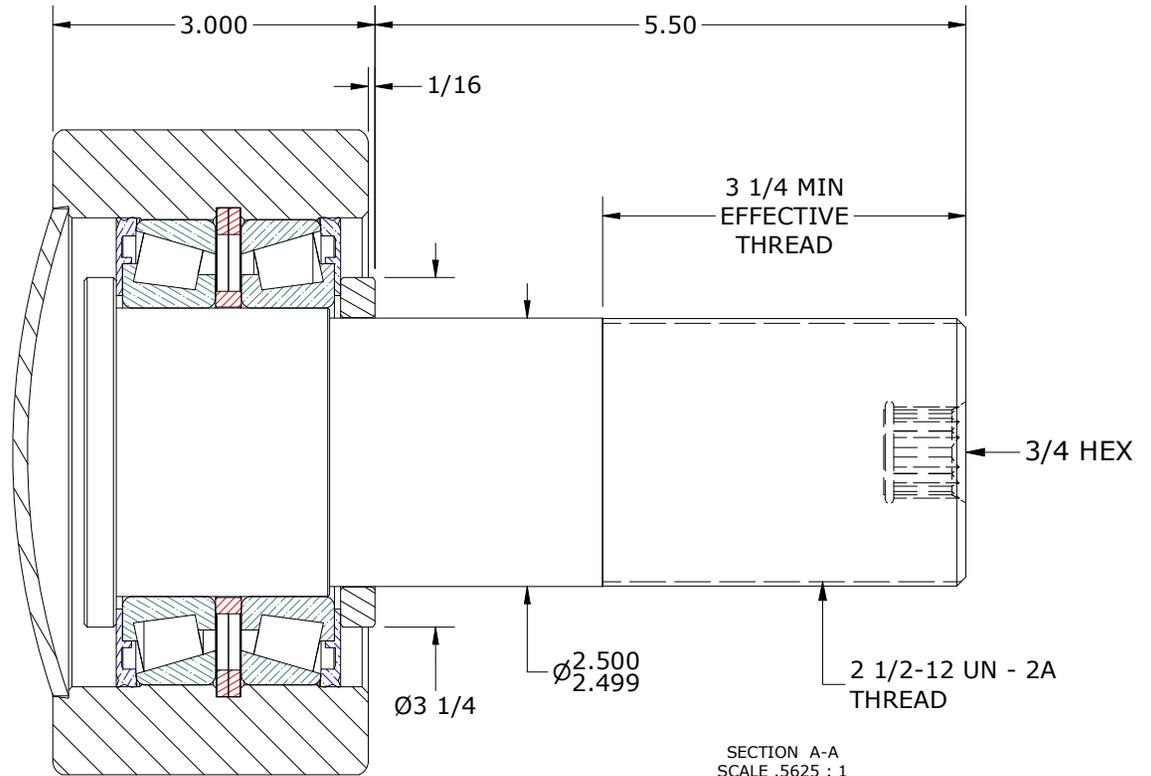

SECTION A-A
SCALE .5625 : 1

MATERIAL NOTES:

- OUTER - BEARING STEEL, HEAT TREATED
- STUD - STEEL
- END CAP - STEEL
- WASHER - STEEL
- SEALS - SYNTHETIC WITH COLD ROLLED STEEL CORE
- BEARING ASSY. - 395LA-90329

CUSTOMER PART#

XX = ± .01
XXX = ± .005
XXXX = ± .0005
ANGLES = ± 2'
INCH [METRIC]
FRACTION = ± 1/64

CARTER MANUFACTURING IS NOT RESPONSIBLE FOR TYPOGRAPHICAL ERRORS

CARTER MANUFACTURING CO., INC.

GRAND HAVEN, MICHIGAN 49417

ENGINEERING CHANGE ORDER NOTE

REVISION

PART NAME: ASSEMBLY

PRODUCT TYPE: PHR

C

AUTHOR BY

DRAWN BY

CHK'D BY

SALES

MATERIAL

HG

RAM

SGW

KPR

NOTED

REVISION BY

DATE

DATE

DATE

DATE

SHEET

MD

9/27/2022

1/28/2010

9/27/2022

6/7/1998

1 OF 2