
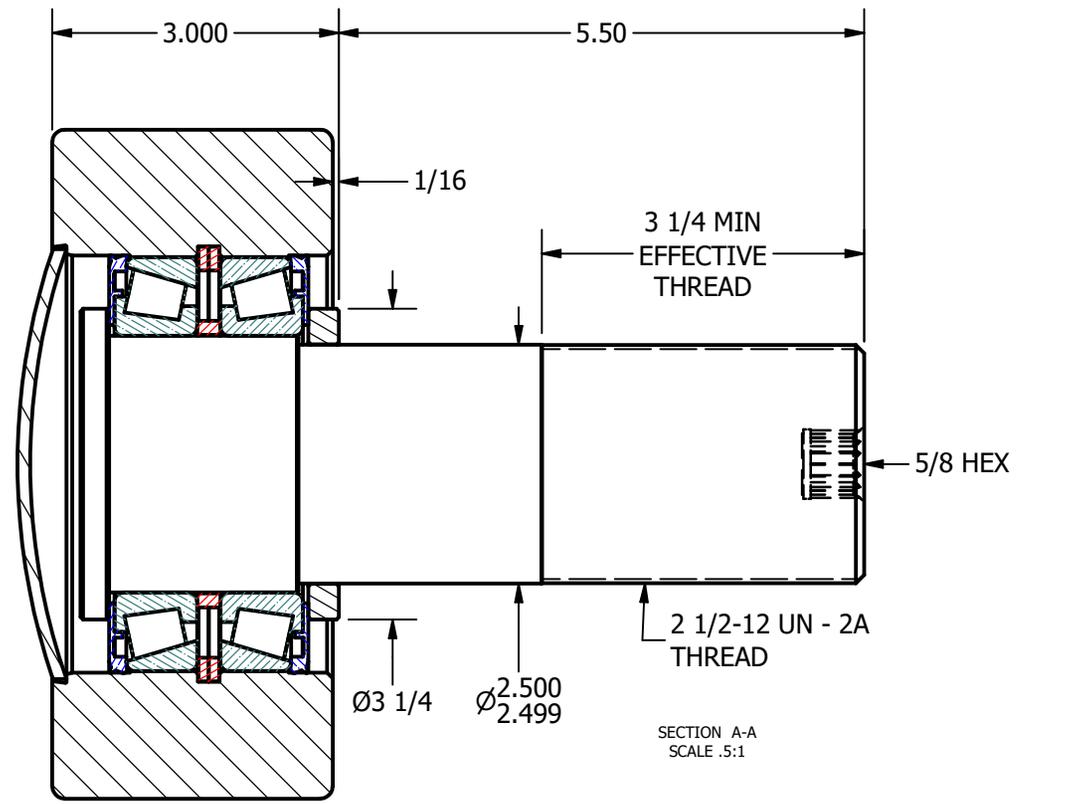
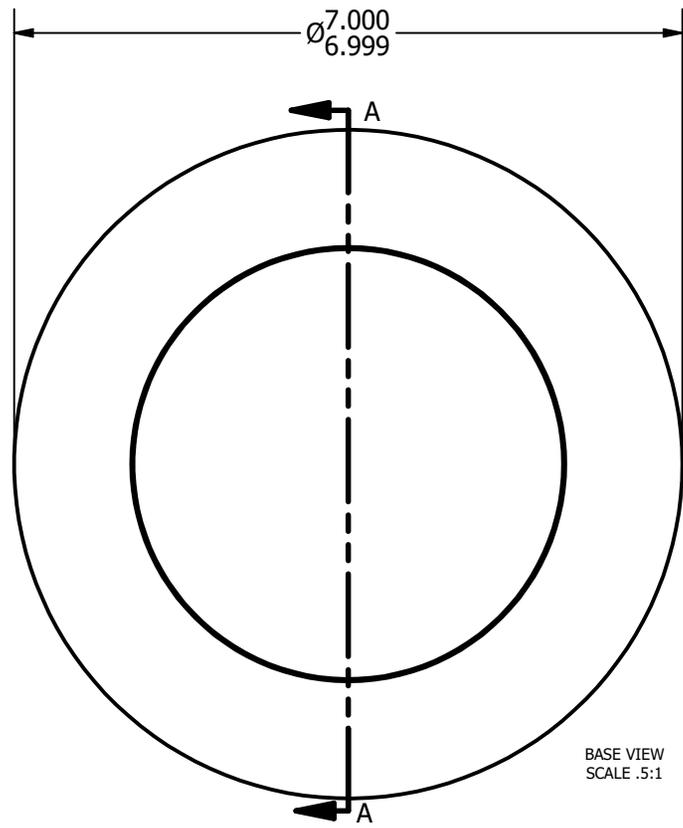


LOAD RATINGS	
RATING	Lbs
RADIAL BASIC DYNAMIC	35,800
DYNAMIC THRUST LOAD	33,200
MAXIMUM STATIC CAPACITY	60,000

NOTES:
 1. BEARING IS PACKED WITH LITHIUM BASED #2 WEIGHT GREASE
 2. OUTER & ENDCAP: ALL EXPOSED SURFACES MAY HAVE BLACK OXIDE

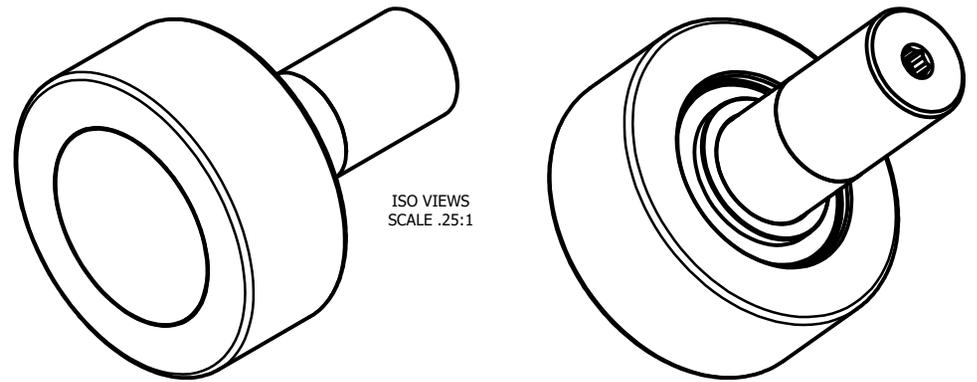

MATERIAL NOTES:
 OUTER - BEARING STEEL, HEAT TREATED
 STUD - COLD ROLLED STEEL
 END CAP - COLD ROLLED STEEL
 WASHER - COLD ROLLED STEEL
 SEAL - SYNTHETIC WITH COLD ROLLED STEEL CORE
 BEARING ASSY. - 395LA-90329

CUSTOMER PART#	.XX = ± .01 .XXX = ± .005 .XXXX = ± .0005 ANGLES = ± 1° INCH [METRIC]
CHANGE NOTE:	

CARTER MANUFACTURING IS NOT RESPONSIBLE FOR TYPOGRAPHICAL ERRORS	
REVISION	
A	AUTHOR. BY
REV. BY	DATE
SGW	

CARTER MANUFACTURING CO., INC.				
GRAND HAVEN, MICHIGAN 49417				
PART NAME: ASSEMBLY			SHEET 1 OF 2	
AUTHOR. BY	DRAWN BY	CHK'D BY	SALES	MATERIAL
	SGW			NOTED
DATE	DATE	DATE	DATE	DRAWING NO.
	3/15/2010			PHR-700-A