
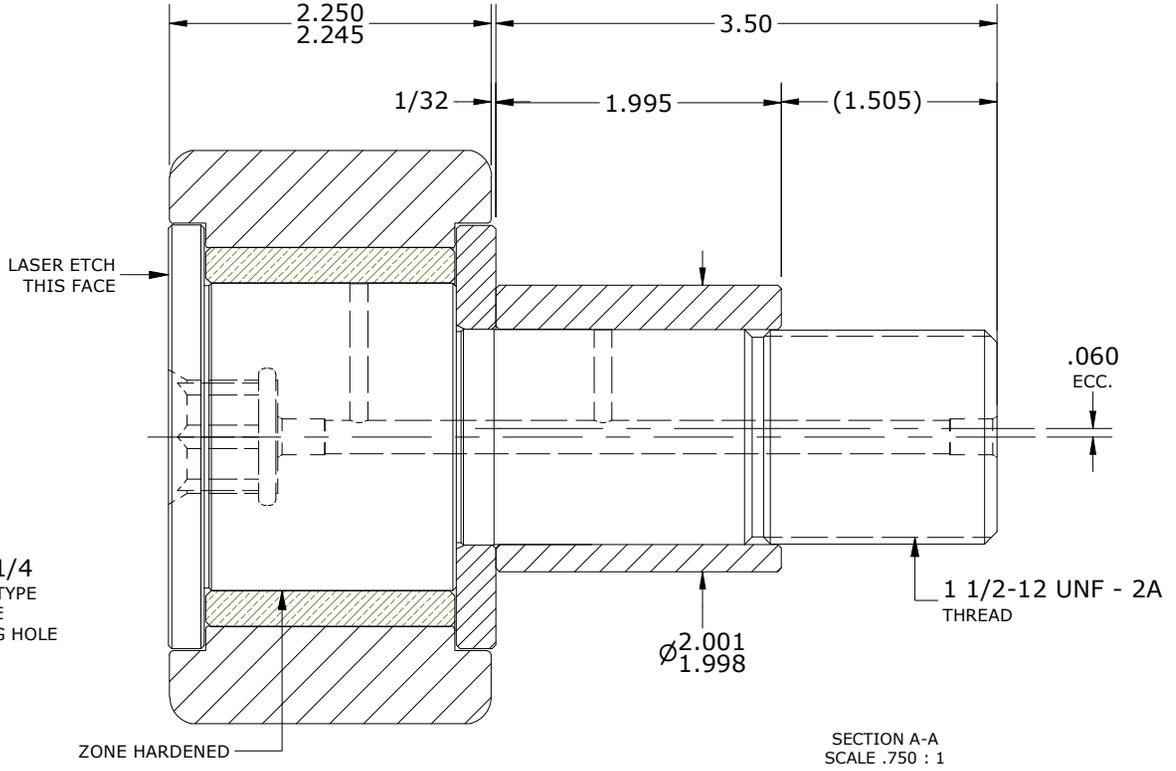
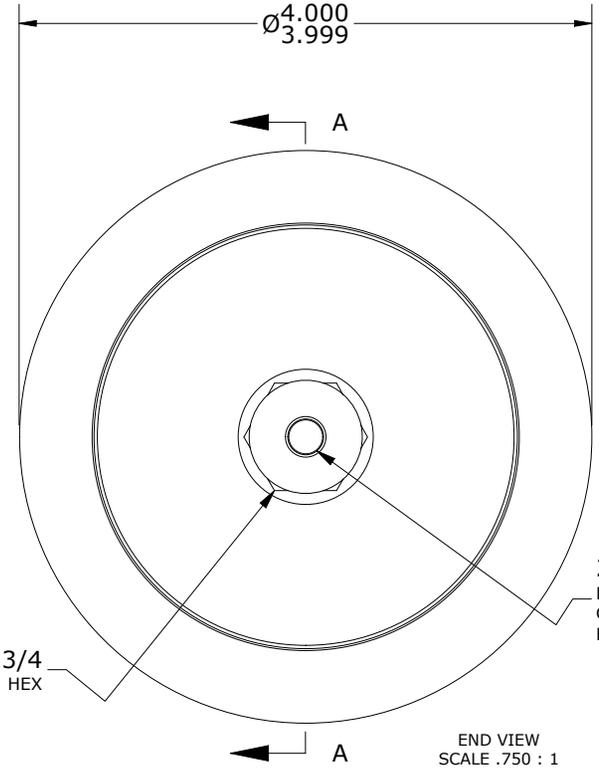


RECOMMENDED MOUNTING HOLE Ø		
Limit	Inch	mm
MIN	2.002	50.8508
MAX	2.004	50.9016

- NOTES:
- BUSHING IS IMPREGNATED WITH CARTER STANDARD NEVERLUBE LUBRICANT.
  - ALL EXPOSED SURFACES HAVE BLACK OXIDE.
  - CUSTOM LASER ETCHING IS AVAILABLE UPON REQUEST.

MAXIMUM CLAMPING TORQUE**	
Inch lbf	Nm
2,500	282.5

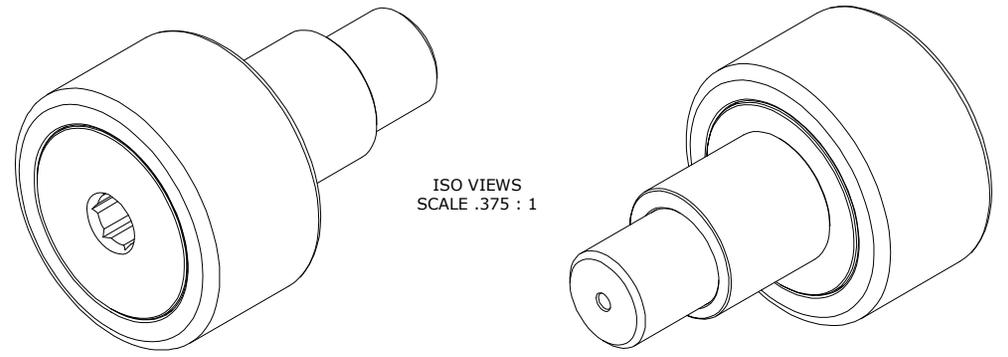

\*\*TORQUE SPECIFICATION IS BASED ON LUBRICATED THREADS, IF USING DRY THREADS DOUBLE TORQUE VALUE

**MATERIAL NOTES:**

OUTER RING - BEARING STEEL, HEAT TREATED  
 STUD - BEARING STEEL, ZONE HARDENED  
 WASHER - STEEL, HEAT TREATED  
 BUSHING - SINTERED BRONZE  
 ECCENTRIC SLEEVE - STEEL

<i>CUSTOMER PART#</i>	XX = ± .01 XXX = ± .005 XXXX = ± .0005 ANGLES = ± 2' INCH (METRIC) FRACTION = ± 1/64
<i>ENGINEERING CHANGE ORDER NOTE</i>	

CARTER MANUFACTURING IS NOT RESPONSIBLE FOR TYPOGRAPHICAL ERRORS				<b>CARTER MANUFACTURING CO., INC.</b> GRAND HAVEN, MICHIGAN 49417			
<i>REVISION</i>				PART NAME: ASSEMBLY		PRODUCT TYPE: Neverlube™	
<b>B</b>	AUTHOR BY HG	DRAWN BY SGW	CHK'D BY MD	SALES NC	MATERIAL NOTED		
REVISION BY SGW	DATE 4/7/2022	DATE 12/20/2016	DATE 4/7/2022	DATE 4/7/2022	SHEET 1 OF 2		