
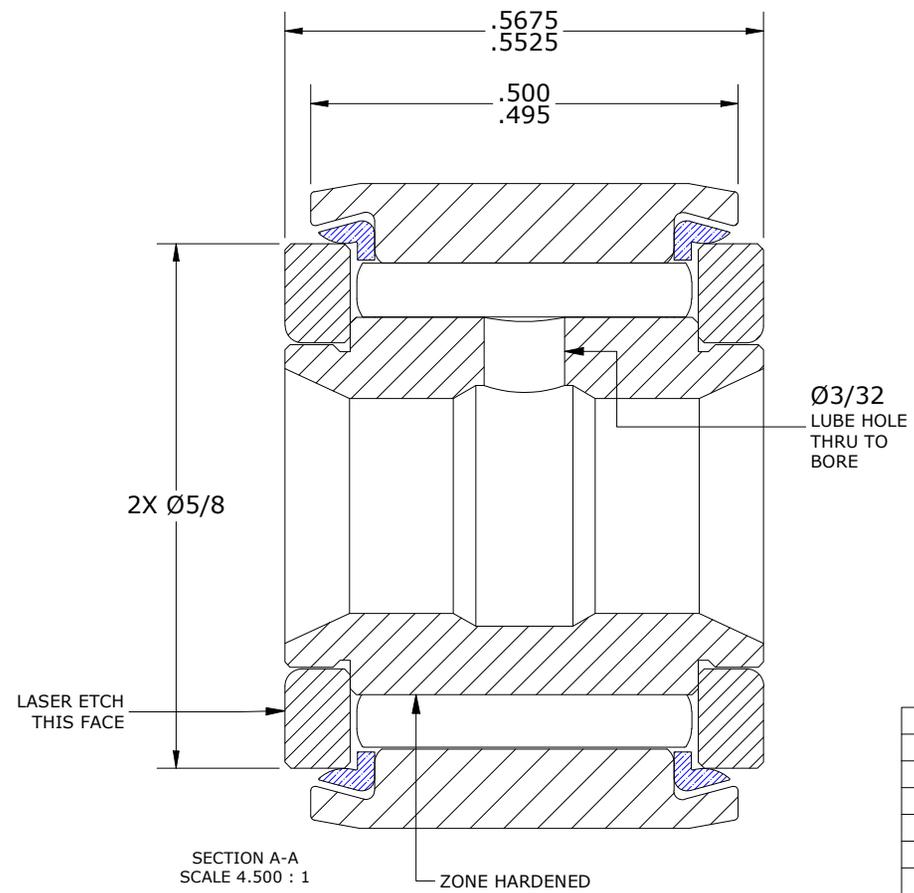
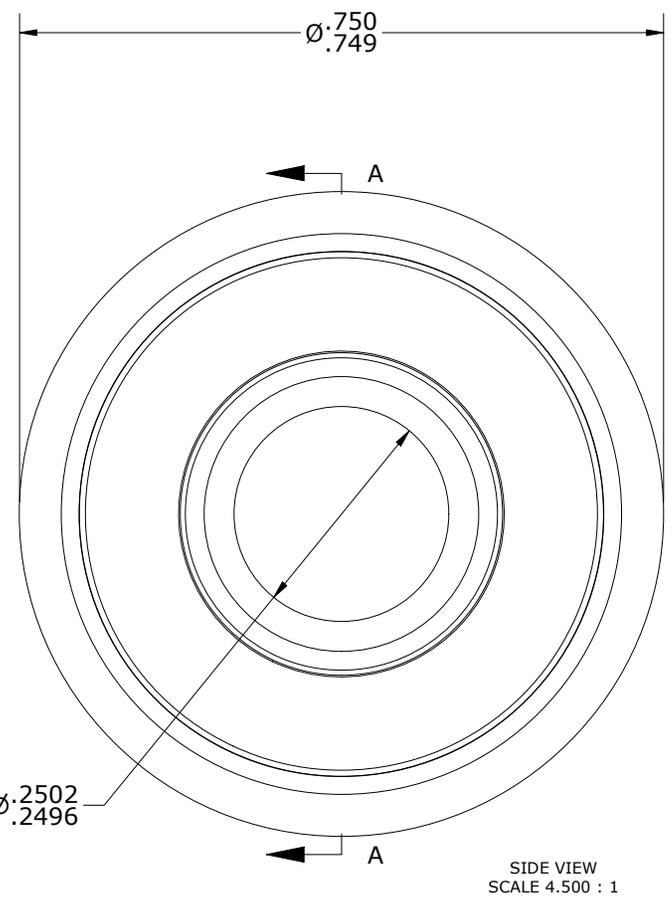


LOAD RATINGS		
RATING	lbf	Newtons
RADIAL BASIC DYNAMIC	1,490	6,628
MAXIMUM STATIC CAPACITY	2,100	9,341

- NOTES:
- BEARING COMES PACKED WITH CARTER STANDARD FOOD GRADE H1, NLGI 2 GREASE
 - LIMITING SPEED:
 - A. GREASE = 6,400 RPM.
 - CUSTOM LASER ETCHING AVAILABLE UPON REQUEST.

ISO VIEW
SCALE 2.250:1

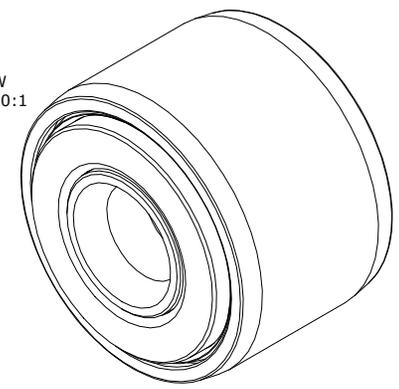

Recommended Shaft Fits		
Fit Type - Dimension	Ø (Inch)	Ø (mm)
Push - Max	.2497	6.3424
Push - Min	.2493	6.3322
Drive - Max	.2503	6.3576
Drive - Min	.2499	6.3475
Press - Max	.2505	6.3627
Press - Min	.2501	6.3525

MATERIAL NOTES:

OUTER RING: 440C STAINLESS STEEL, HEAT TREATED

INNER RING: 440C STAINLESS STEEL, ZONE HARDENED

WASHER(S): 440C STAINLESS STEEL, HEAT TREATED

NEEDLE ROLLER(S): 440C STAINLESS STEEL, HEAT TREATED

SEAL(S): SYNTHETIC

CUSTOMER PART#	XX = ± .01 XXX = ± .005 XXXX = ± .0005 ANGLES = ± 2' INCH [METRIC] FRACTION = ± 1/64
ENGINEERING CHANGE ORDER NOTE	

CARTER MANUFACTURING IS NOT RESPONSIBLE FOR TYPOGRAPHICAL ERRORS

REVISION	
D	AUTHOR BY HG
REVISION BY SGW	DATE 6/26/2023

CARTER MANUFACTURING CO., INC.
GRAND HAVEN, MICHIGAN 49417

PART NAME: ASSEMBLY			PRODUCT TYPE: Xtenda™		
DRAWN BY GJP	CHK'D BY MD	SALES NC	MATERIAL NOTED		
DATE 7/15/2000	DATE 6/26/2023	DATE 6/26/2023	SHEET 1 OF 2		