
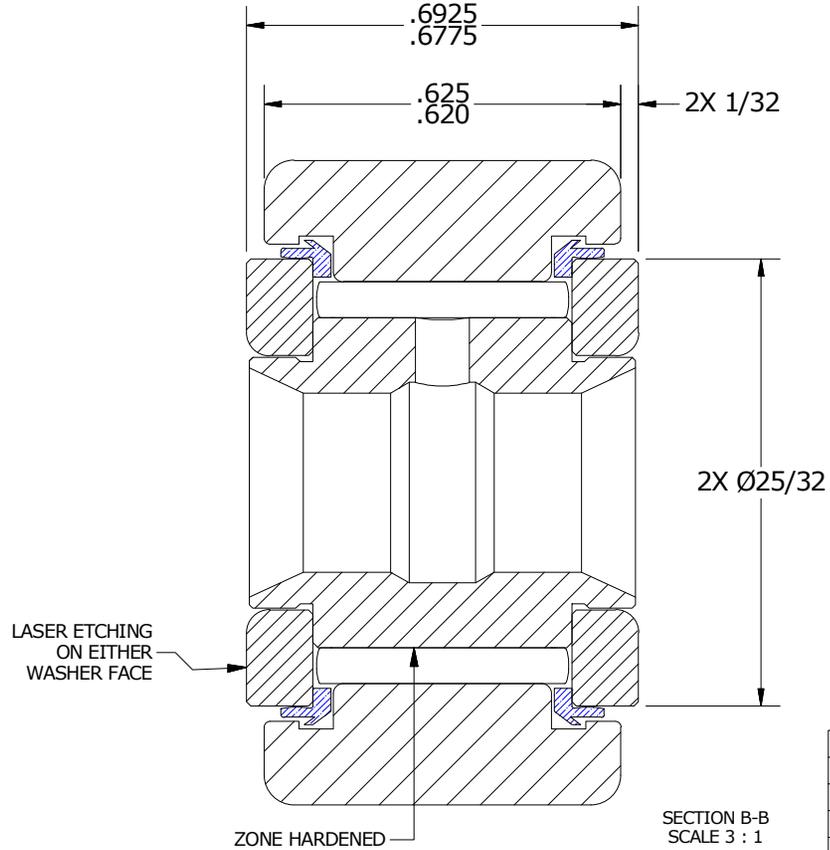
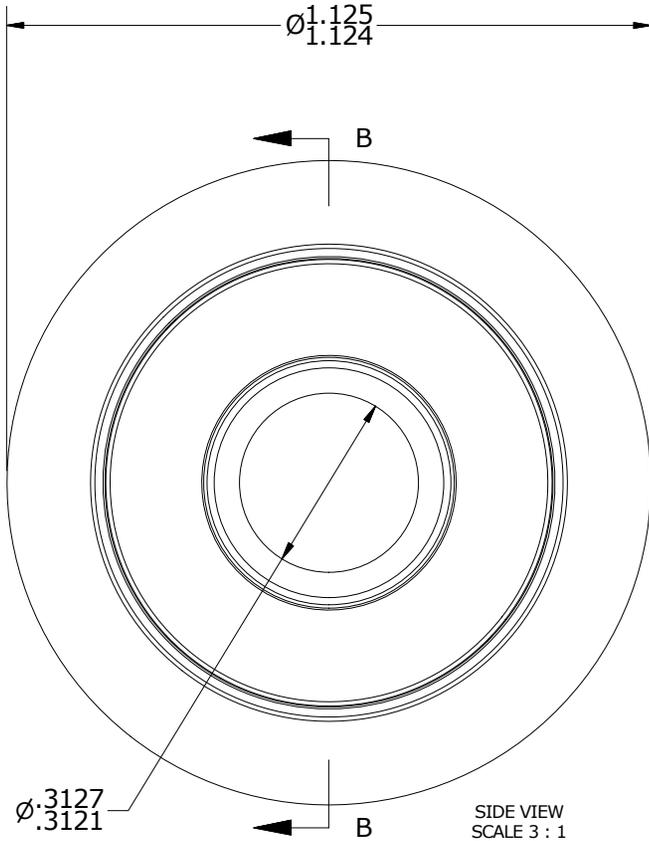


LOAD RATINGS		
RATING	lbf	Newton
RADIAL BASIC DYNAMIC	2,000	8,896
MAXIMUM STATIC CAPACITY	5,400	24,020

- NOTES:
- BEARING IS PACKED WITH NLGI GRADE 2, H1 FOOD GRADE GREASE (UNLESS OTHERWISE SPECIFIED)
  - LIMITING SPEED:
    - GREASE = 3,400 RPM
  - CUSTOM LASER ETCHING UPON REQUEST

ISO VIEW  
SCALE 1.500 : 1

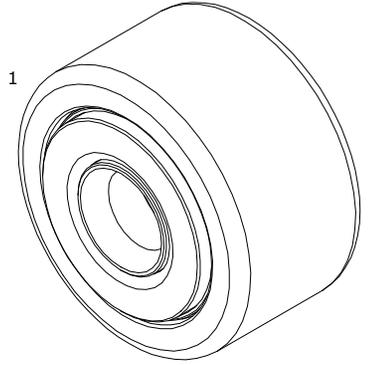

Recommended Shaft Fits		
Fit Type - Dimension	Ø (Inch)	Ø (mm)
Push - Max	.3122	7.9300
Push - Min	.3118	7.9197
Drive - Max	.3128	7.9451
Drive - Min	.3124	7.9350
Press - Max	.3130	7.9502
Press - Min	.3126	7.9400

MATERIAL NOTES:

OUTER RING - 440C STAINLESS STEEL, HEAT TREATED  
 INNER RING - 440C STAINLESS STEEL, ZONE HARDENED  
 NEEDLE ROLLER(S) - 440C STAINLESS STEEL, HEAT TREATED  
 WASHER(S) - 440C STAINLESS STEEL, HEAT TREATED  
 SEAL(S) - SYNTHETIC

CUSTOMER PART#

XX = ± .01  
 XXX = ± .005  
 XXXX = ± .0005  
 ANGLES = ± 1'  
 INCH [METRIC]  
 FRACTION = ± 1/32

CARTER MANUFACTURING IS NOT RESPONSIBLE FOR TYPOGRAPHICAL ERRORS

**CARTER MANUFACTURING CO., INC.**  
 GRAND HAVEN, MICHIGAN 49417

ENGINEERING CHANGE ORDER NOTE

REVISION

PART NAME: ASSEMBLY

PRODUCT TYPE: SC

C

AUTHOR BY  
DB

DRAWN BY  
JGV

CHK'D BY  
MD

SALES  
KR

MATERIAL  
NOTED

REVISION BY  
SGW

DATE  
7/8/2013

DATE  
10/17/2003

DATE  
7/8/2013

DATE  
7/8/2013

SHEET  
1 OF 2