
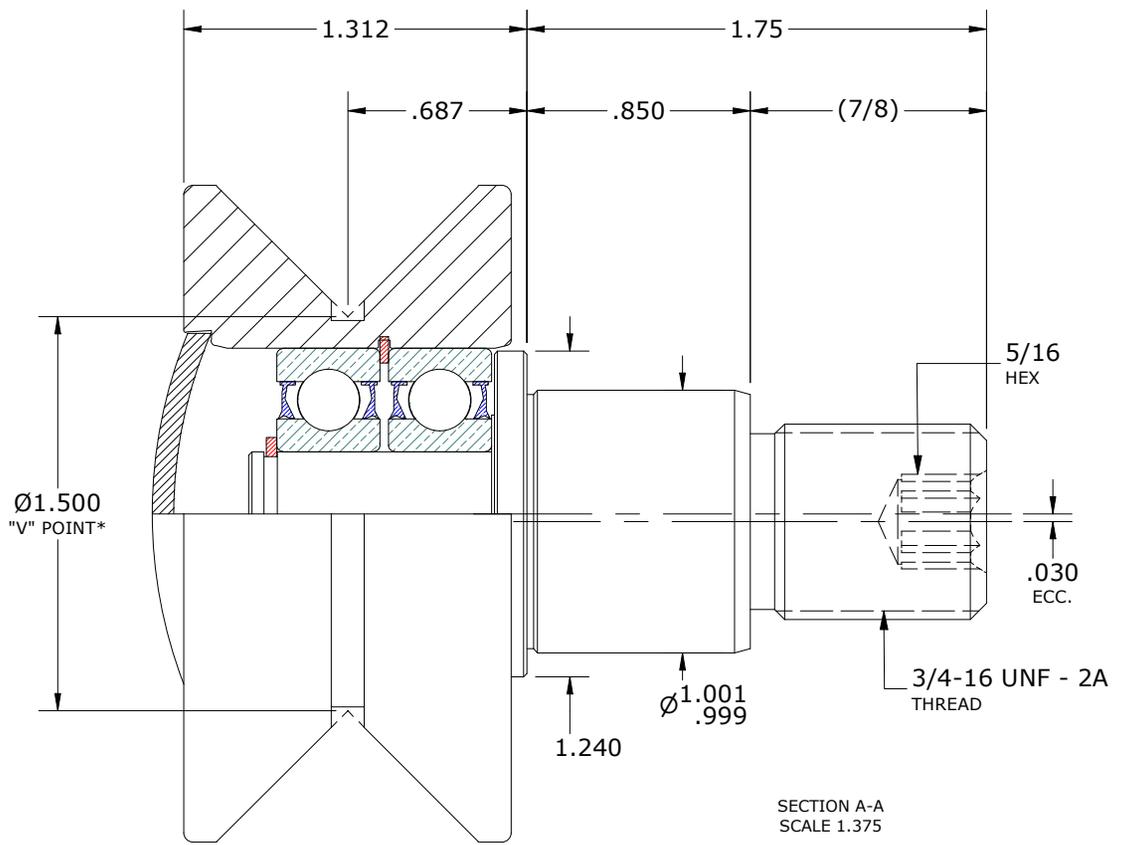
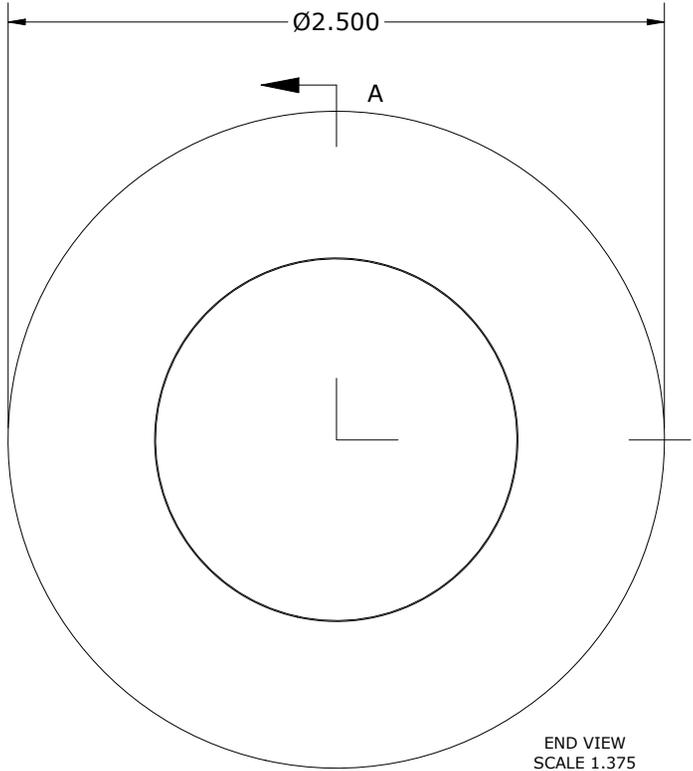


LOAD RATINGS	
RATING	Lbs
RADIAL BASIC DYNAMIC	2,760
STATIC THRUST LOAD	680
MAXIMUM STATIC CAPACITY	1,100

NOTES:
 1. BALL BEARINGS COME PRE-PACKED WITH GREASE
 2. STUD, OUTER HOUSING AND END CAP HAVE BLACK OXIDE ON ALL EXPOSED SURFACES.

DRAWING NO. VHRE-250-A

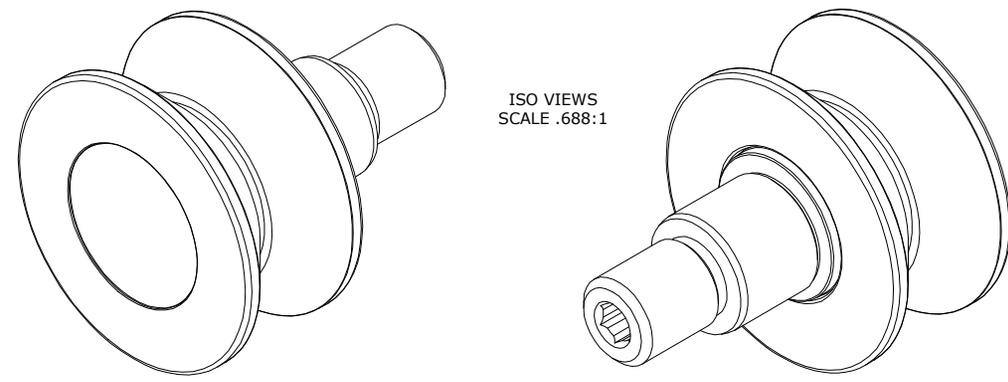

*DIMENSION IS PULLED FROM VIRTUAL POINTS

MATERIAL NOTES:
 OUTER ROLLER HOUSING - BEARING STEEL, HEAT TREATED
 STUD - STEEL
 BALL BEARING ASSEMBLIES - 6201 2RS
 END CAP - STEEL
 RETAINING RING(S) - SPRING STEEL

CUSTOMER PART#	XX = ± .01 XXX = ± .005 XXXX = ± .0005 ANGLES = ± 2' INCH [METRIC] FRACTION = ± 1/64
ENGINEERING CHANGE ORDER NOTE	
CARTER STANDARD SURFACE FINISH IS MEASURED IN "Ra" UNITS UNLESS OTHERWISE SPECIFIED.	

CARTER MANUFACTURING IS NOT RESPONSIBLE FOR TYPOGRAPHICAL ERRORS	
REVISION	
B	AUTHOR BY HG
REVISION BY SGW	DATE 12/5/2017

CARTER MANUFACTURING CO., INC. GRAND HAVEN, MICHIGAN 49417				PART NAME: ASSEMBLY		PRODUCT TYPE: Hi-Rollers™	
DRAWN BY AJH	CHK'D BY MD	SALES KR	MATERIAL NOTED	DATE 2/14/2003	DATE 12/5/2017	DATE 12/5/2017	SHEET 1 OF 2