
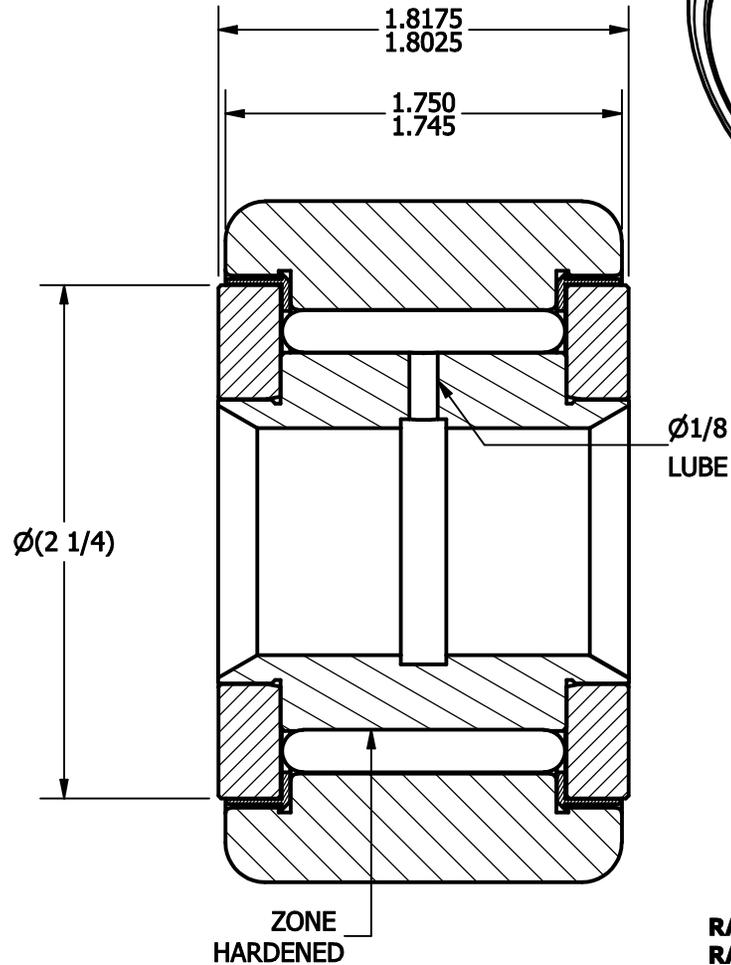
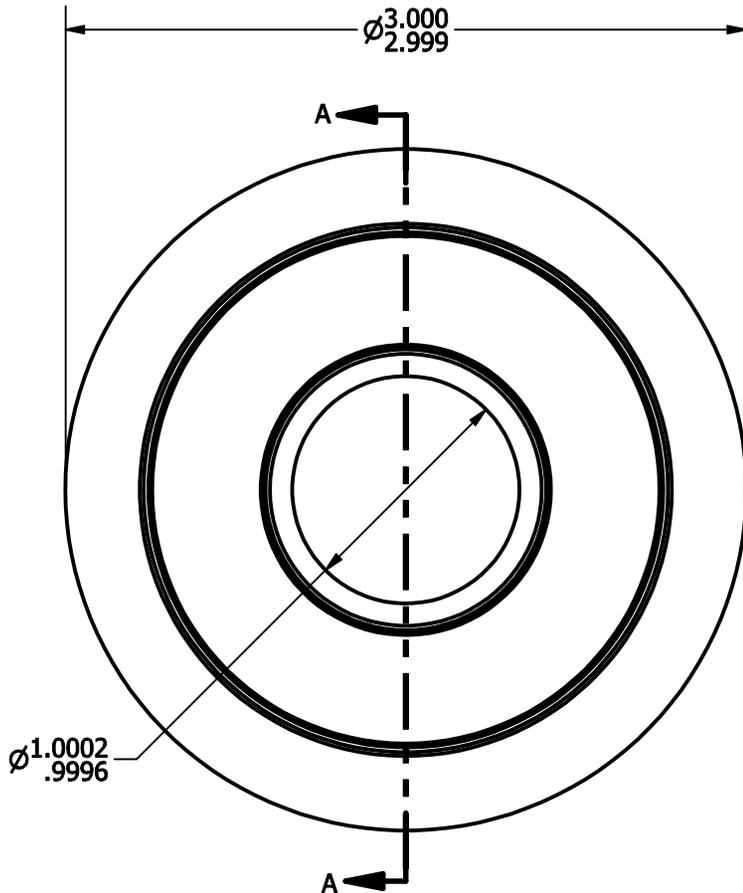


- NOTES:**
1. BEARING IS PACKED WITH GREASE
2. ALL EXPOSED SURFACES ARE BLACK OXIDED

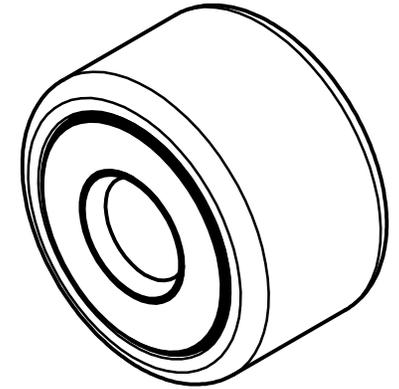

RADIAL BASIC DYNAMIC RATING (POUNDS) 15,720

MAXIMUM STATIC CAPACITY (POUNDS) 49,820

MATERIAL NOTES:

- OUTER - BEARING STEEL, HEAT TREATED**
STUD - BEARING STEEL, ZONE HARDENED
NEEDLE - BEARING STEEL, HEAT TREATED
WASHER - COLD ROLLED STEEL, HEAT TREATED
SEAL - SYNTHETIC

CUSTOMER PART#

.XX = ± .01
 .XXX = ± .005
 .XXXX = ± .0005
 ANGLES = ± 1'
 INCH [METRIC]

CHANGE NOTE:

CARTER MANUFACTURING IS NOT RESPONSIBLE FOR TYPOGRAPHICAL ERRORS

CARTER MANUFACTURING CO., INC.

GRAND HAVEN, MICHIGAN 49417

REVISION

PART NAME: ASSEMBLY

SHEET 1 OF 2

B	<i>AUTHOR. BY</i>	<i>DRAWN BY</i>	<i>CHK'D BY</i>	<i>SALES</i>	<i>MATERIAL</i>
		DB	GJP	MD	KPR
<i>REV. BY</i>	<i>DATE</i>	<i>DATE</i>	<i>DATE</i>	<i>DATE</i>	<i>DRAWING NO.</i>
SGW	8/19/2008	11/17/1999	8/19/2008	11/16/1999	YNB-96-S